

SHANDOKA LOT REDEVELOPMENT PROJECT

PLANNING AND ZONING WORKSESSION

MAY 2026


Applicant: Design Workshop
Owner: The Town of Telluride

PROJECT TEAM

DESIGNWORKSHOP

**Cushing
Terrell**

**ROARING FORK
ENGINEERING**

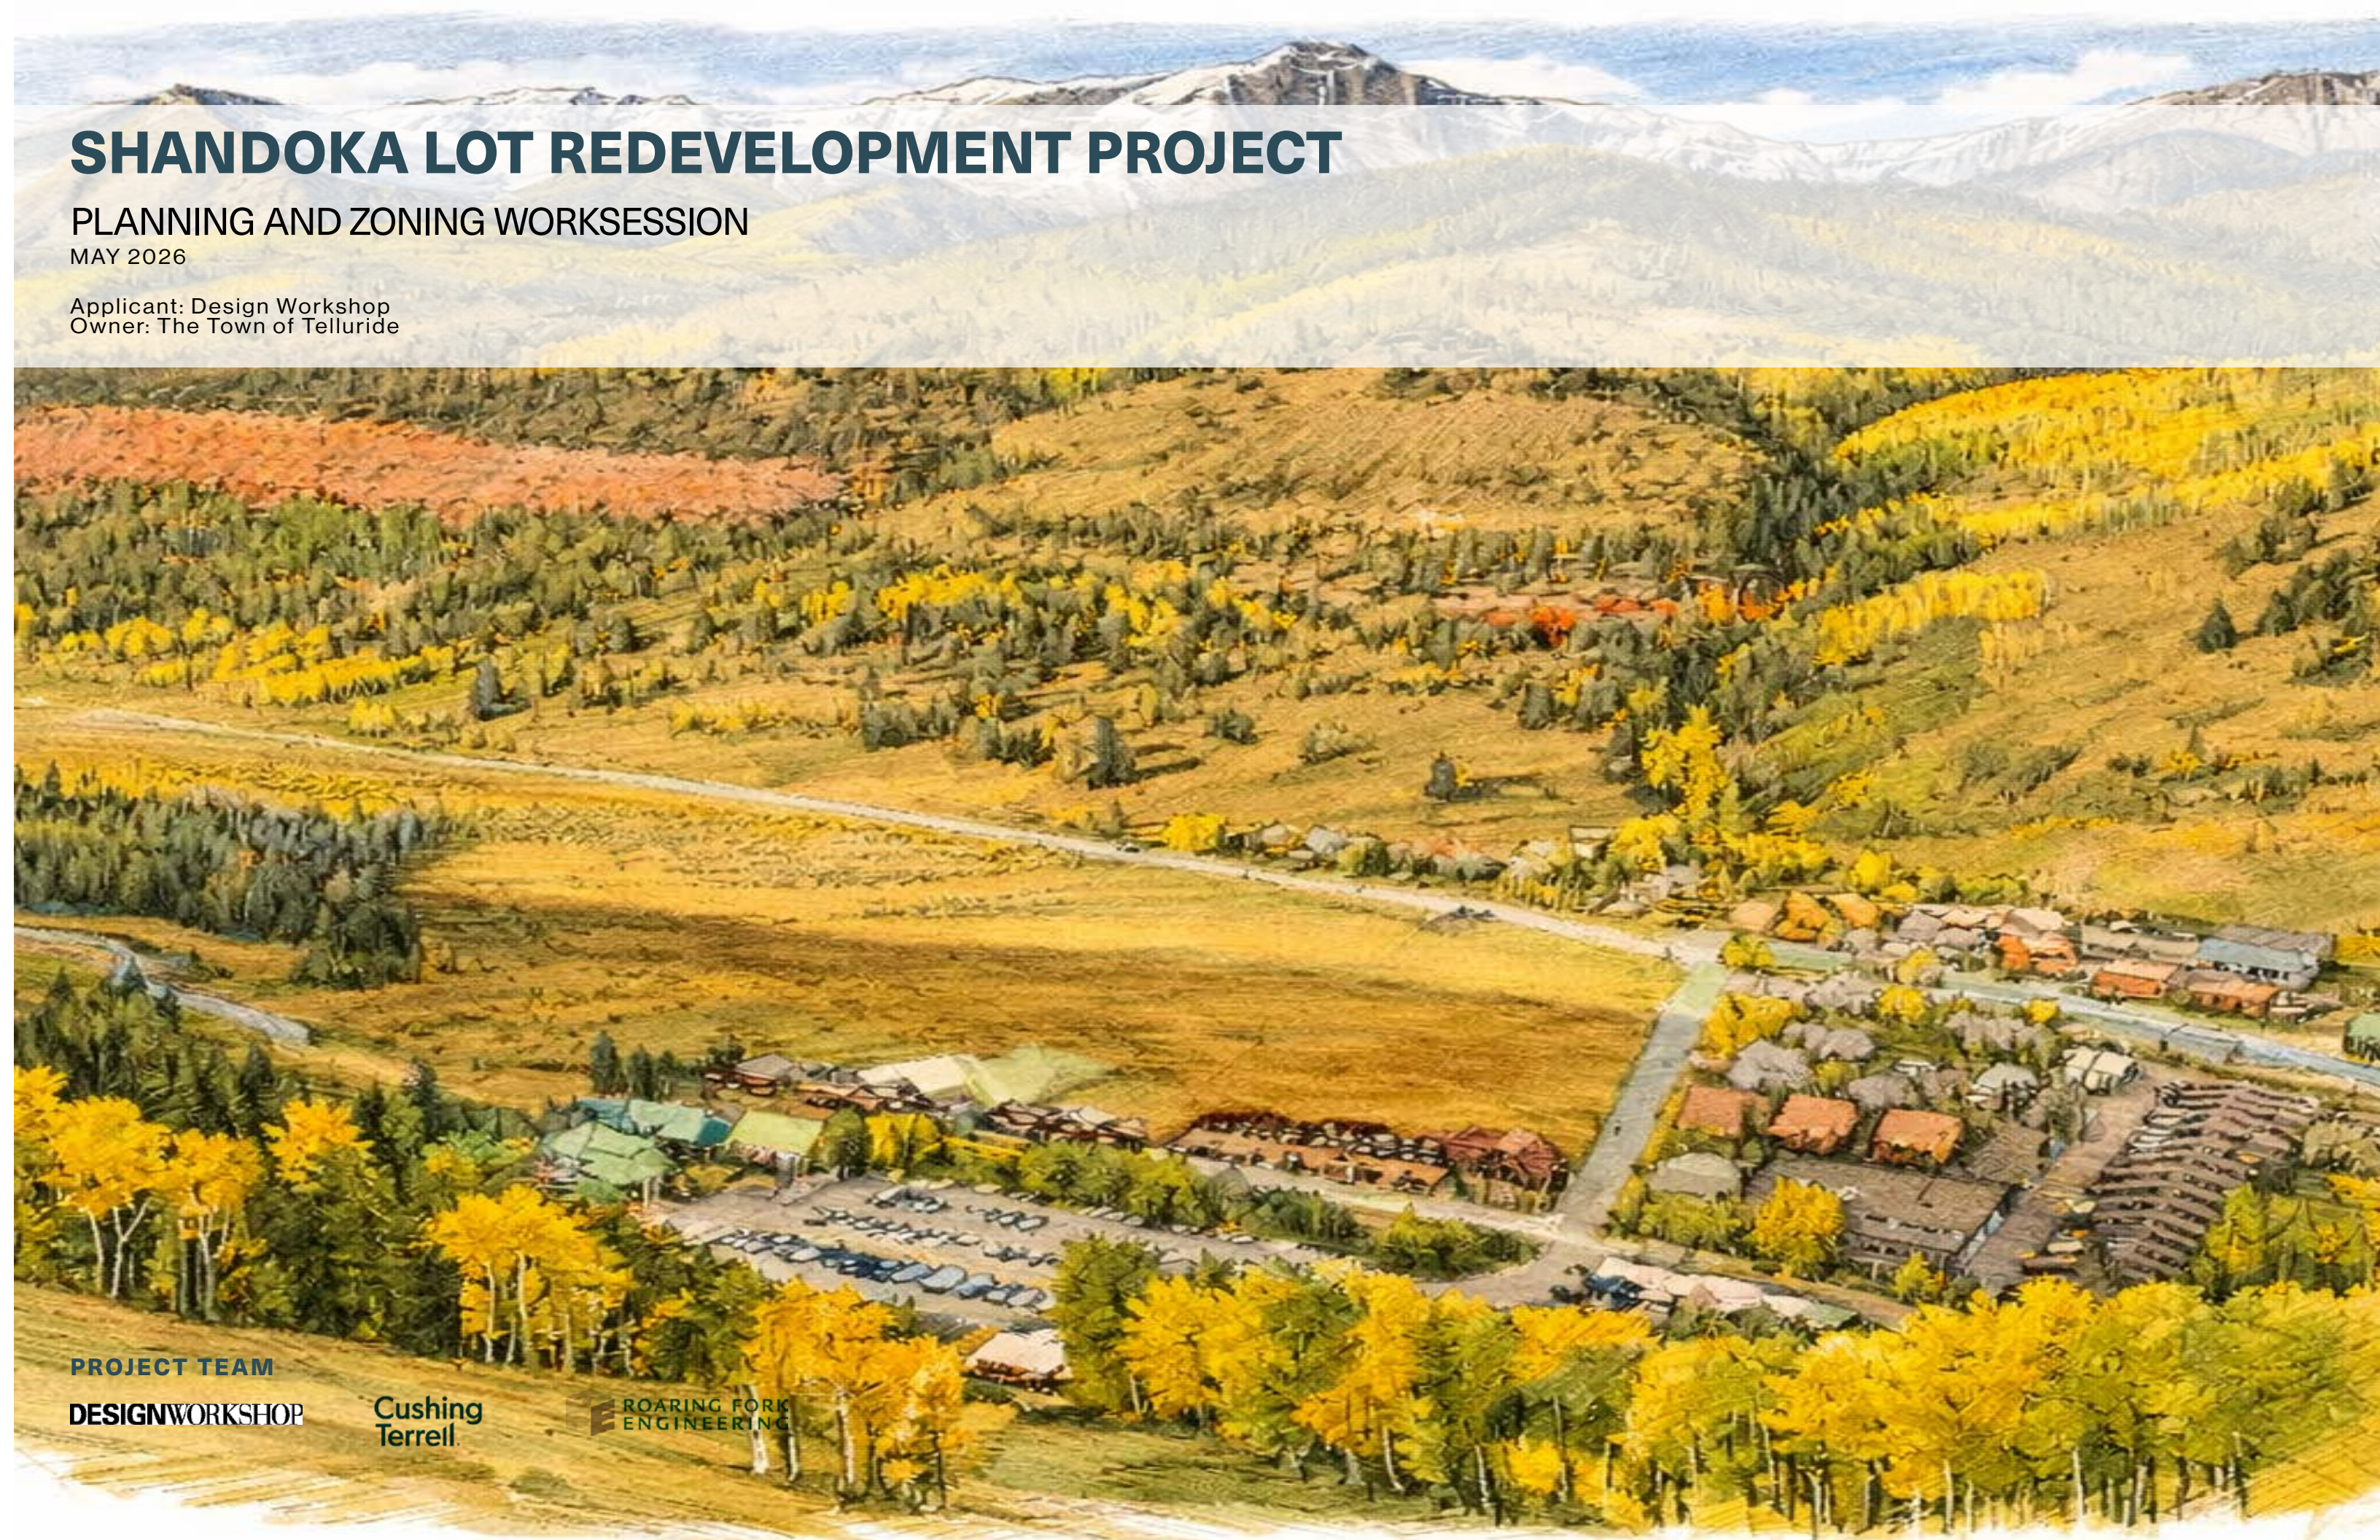

PZ WORKSESSION

Minimum Application Contents	Page 2
Narrative	Page 2
Development Context	Pages 3-5
Improvements Survey	Page 6
Site Conditions	Pages 7-8
 Site Concept Evolution	 Pages 9-15
 Proposed Concept 2B	
Site Plan	Page 17
Site Character	Page 18
Circulation Diagrams	Pages 1-20
Streetscape Character	Pages 21
Architectural Character	Pages 22-29

MINIMUM APPLICATION CONTENTS

- Narrative (Page 3-4)**
- Vicinity Map (Exhibit A)**
- Legal Description (Exhibit B)**
- Site Improvements Survey (Exhibit C)**
- Site Plan (Exhibit D)**
- Letter of Representation (On File)**
- Title Commitment (On File)**

NARRATIVE

PROJECT SITE

This application is submitted by Design Workshop on behalf of the Town of Telluride to advance a vision for the Shandoka Lot Redevelopment Project (Lot L). The existing project site is 4.07 Acres and includes a gravel parking area, bike storage, and frontage along the San Miguel River.

PROJECT VISION

This project represents a unique opportunity to increase public parking, affordable housing, community-serving uses, and public-serving infrastructure, creating a strong sense of place in the southwest region of Telluride. Rooted in community values as outlined in Telluride’s Master Plan, Southwest Area Conceptual Plan (SACP), and Telluride Regional Housing Strategy, the site is an opportunity to envision a neighborhood and community gathering place for residents and neighbors.

PROJECT REQUIREMENTS

The purpose of this worksession is to review progress on the Shandoka Lot Redevelopment Project and receive input from the Telluride Planning and Zoning Commission (PZ) on the site plan and public benefits of the latest design.

The Shandoka Lot Redevelopment Project requires a Planned Unit Development (PUD) process to vary certain dimensional limitations. The site presents limitations such as high ground water and proximity to the San Miguel River Corridor. The PUD enables an integrated and community-focused outcome that aligns with the goals of the Town and County’s adopted plans.

The site is zoned Accommodations 2 (AC2) and all the land uses proposed within comply with this zone district. A PUD application will seek to includes dimensional limitations for site coverage, building heights, and maximum building size. The following is a summary of the variation and public benefits provided;

- **Increase Maximum Building Height above the 40’ midpoint and increase Maximum Ridge Height above 45’ for portions of Building 1 (Parking Facility)**
- **Increased site coverage above 40%**
- **Increased Maximum Floor Area per Structure above 30,000 sq.ft.**
- **Lower then required Building Heights along the River**


PUBLIC BENEFITS

The proposed improvements will provide public benefits in the form of public parking, affordable housing, neighborhood-serving commercial uses, and lowered maximum heights along the River including;

- **Increased Parking and Transit Related Uses:** +/- 900 spaces for residents, commuters, and visitors (such as skiers) and a +/-2,700 sq.ft transit center/commuter bike storage serves to increase public parking and reduce commuting pressures, therefore strengthening the local economy.
- **Neighborhood-serving Commercial:** +/- 6,000 sq.ft. commercial for childcare, food bank, fitness and retail/restaurant to empower local businesses and encourage social interaction to be a more livable and economically resilient.
- **Housing:** +/-57,600 sq.ft. (+/-60 units) of affordable housing with a limited number of units which can be free market helps to sustain a diverse, year-round residential base by allowing those who work in the town to live and play as members of the community.

DEVELOPMENT CONTEXT

VICINITY MAP (Exhibit A)

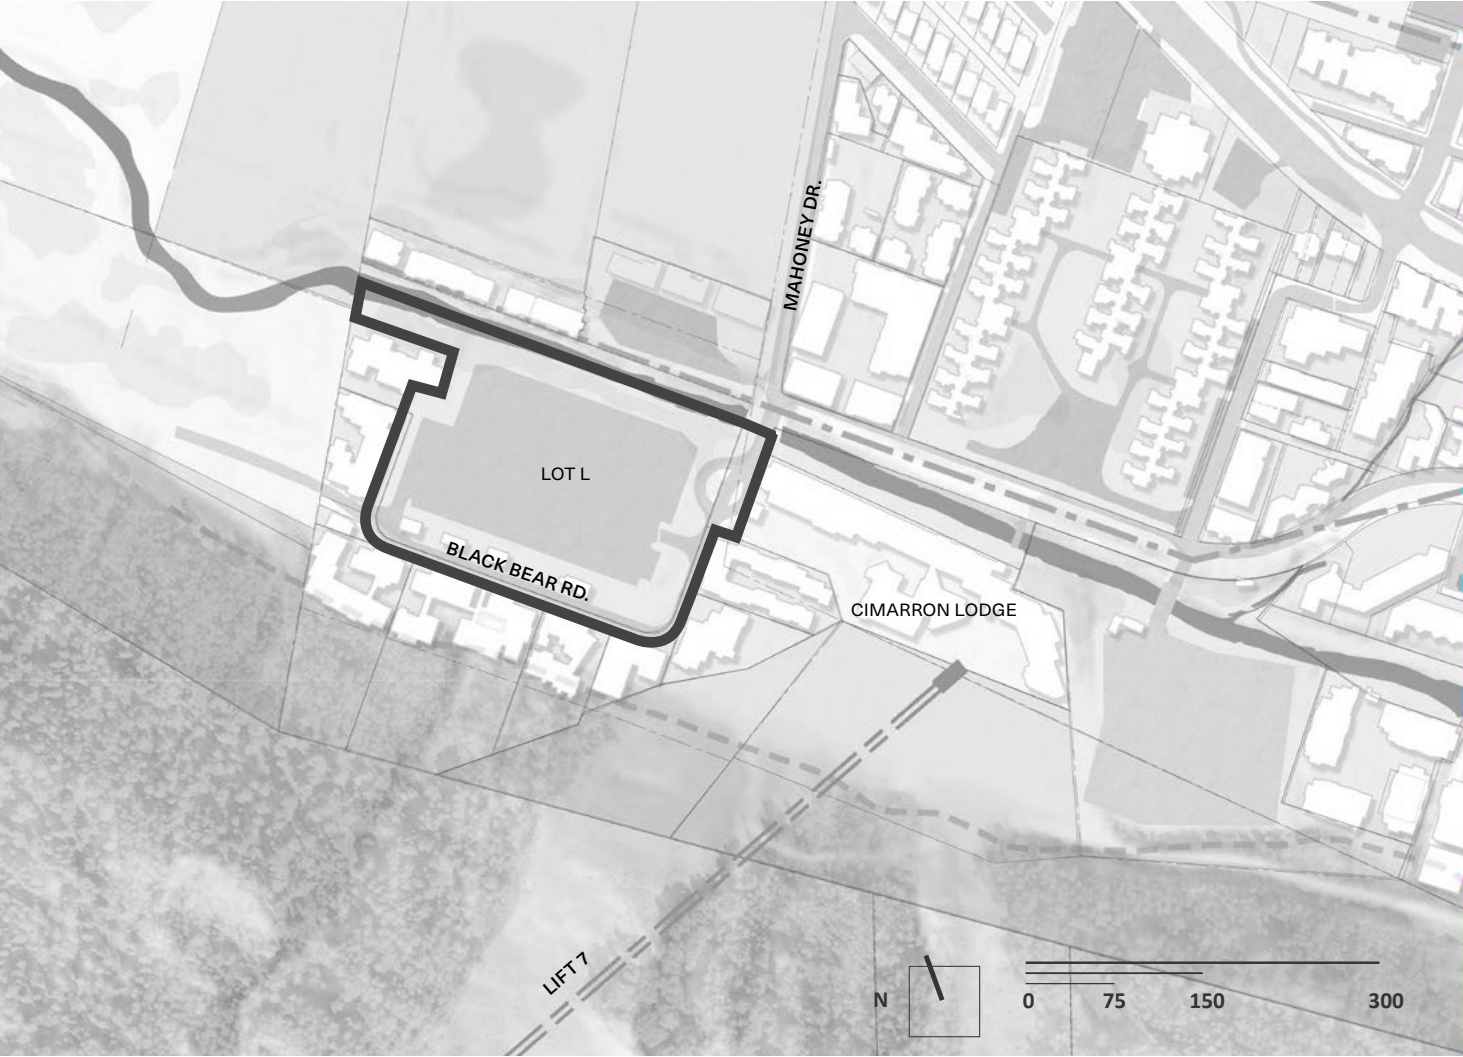

LEGAL DESCRIPTION (Exhibit B)

Lot L, Backman Village Subdivison, According to the Replat of Lots J and L recorded January 30, 1996 in Plat Book 1 at Page 1991

NEIGHBORHOOD CONTEXT

The Shandoka Lot site is located in Telluride's southwest area near the base of Lift 7 with direct access to transit, trails, and the San Miguel River. Currently, the site is used as a surface parking lot with auto-oriented infrastructure, and bike parking and trash enclosures for the adjacent residences. The site is currently disconnected from the Town with a limited sense of place and neighborhood.

The site is on the Town's Galloping Goose transit loop, with existing stops for Shandoka and other buildings, providing frequent, free connections to downtown, the gondola, and key destinations throughout Telluride.

Surrounding development is primarily comprised of a mix of residential and lodging with limited commercial uses, largely built in the 1970s and 1980s. Nearby properties include Shandoka, Creekside, Double Diamond, Cimarron Lodge, and Etta Place One & Two, with Entrada and Longwill Residences located north of the San Miguel River.

The Shandoka Lot Redevelopment project provides needed public infrastructure such as parking, housing, and community spaces and is an opportunity to redefine the area as a neighborhood with intentional pedestrian and transit oriented places.



Etta Place One



Etta Place Two



Shandoka



Double Diamond



Cimarron Lodge

DEVELOPMENT INFLUENCES

ADOPTED TOWN PLANS

Planning for the Shandoka Redevelopment Project is informed by the goals and policies established in the Telluride Master Plan and the Southwest Area Conceptual Plan (2021). These documents identify the southwest area of town as a key location for coordinated improvements related to housing, parking, transportation, and community services. These guiding policies are central to the process of the evolution of the plan alternatives herein.

TELLURIDE MASTER PLAN

The Telluride Master Plan emphasizes preserving the town’s historic character, small-town identity, and sense of community. Key themes include affordable housing, ensuring that local workers could continue living in town; sustainable land use, focusing on infill development and limiting sprawl; and transportation planning, aimed at reducing car dependency and enhancing pedestrian and bike access. The plan also prioritizes responsible tourism, recognizing the need to balance economic benefits with community values, reflecting a strong desire to safeguard the unique character and livability of Telluride.

The Shandoka Redevelopment Project integrates current development needs with long-standing community values. The plan prioritizes a diverse mix of affordable housing units, incorporating both rental and ownership units in various sizes, to accommodate the needs of permanent residents and seasonal employees. The proposed development supports a balanced supply of commercial services to meet the evolving demands of locals and visitors. Through the thoughtful integration of housing, lodging, transportation linkages, recreational infrastructure, trails, and public

spaces, the project is guided by these specific goals, objectives, and policies outlined within the Telluride Master Plan:

- Provide adequate parking facilities to serve the demand of visitors, residents, and commuters while balancing the desire to maintain a pedestrian-oriented community, the Town will continue to plan an “intercept” strategy for some diversion of vehicles to parking areas at the public parking facility in southwest Telluride and in nearby public lots.
- Maintain and enhance the unique sense of community that is present in Telluride today.
- Provide for the construction and maintenance of affordable housing within the Town and the region which serves both permanent population and seasonal employees and includes both rental and ownership, in a mixture of locations an unit types.
- Ensure an adequate and well balanced supply of commercial facilities to serve the existing and proposed permanent and visitor population of the Telluride region.

SOUTHWEST AREA CONCEPTUAL PLAN

The Southwest Area Conceptual Plan (SWAP), adopted by the Telluride Town Council in 2021, outlines a comprehensive vision for revitalizing the southwest quadrant of Telluride, encompassing areas such as Shandoka, Virginia Placer, Carhenge, and the River Trail. The plan aims to address key challenges in the area, including underutilized public land, traffic congestion, limited neighborhood amenities, and inadequate pedestrian and bicycle infrastructure.

A core component of the plan is the development of new affordable housing units and transportation improvements, with proposals for safer pedestrian and bicycle pathways, enhanced transit access, and the creation of intercept parking facilities to alleviate downtown congestion. Additionally, the plan envisions the establishment of community spaces such as parks, playgrounds, and small commercial establishments, fostering a livable, walkable neighborhood. The SWAP serves as a conceptual framework establishing target development densities suitable for the southwest area. The outlined densities in the SWAP Plan are as follows:

- Lot L + Shandoka: 155-195 Housing Units, 960-1060 Parking Spaces (300 Commuter spaces, retain current parking, relocate parking from Carhenge, parking for new housing/residents);
- 5-10k sqft. Transit Oriented Commercial;
- Neighborhood-Serving Commercial/Childcare;
- New Playground/Pocket Parks;
- All required parking on-site.


For planning purposes, these numbers serve as the baseline, this planning effort aims to achieve the programmatic goals of the SWAP.

PROJECT HISTORY






Following the Southwest Area Conceptual Plan (SWAP) in 2021, the Lot L Feasibility and Concept Plan was initiated in 2022 to explore the recommendations for the Shandoka Lot. These initial studies organized the site around a structured parking garage with attached housing and park area for the neighborhood on the western portions of the site.

In the summer of 2025, the plan was revised and shared with the Telluride community, neighborhood residents, Town Council and HARC. This plan is identified herein as the Alternative 1 Concept Plan. Key themes from these discussions included breaking the development into multiple structures to reduce overall scale, improving pedestrian character, and developing a clearer architectural expression for the Transit Area. Council and review bodies also emphasized the importance of creating building modules with distinct architectural character that reflect the context of the surrounding neighborhood.

The plans were further revised based on feedback into what is presented herein as Alternative 2 Concept Plan, which revised the parking to increase the underground footprint and reduce above grade size and introduced a three building concept. This plan also expanded the neighborhood-serving commercial and community spaces. The design team shared the Alternative 2 Concept with Town Council, which received the plan as a positive improvement and requested additional community input, which occurred in March of 2026. Since March, the plans have been further refined into a the Alternative 2B concept as presented herein.

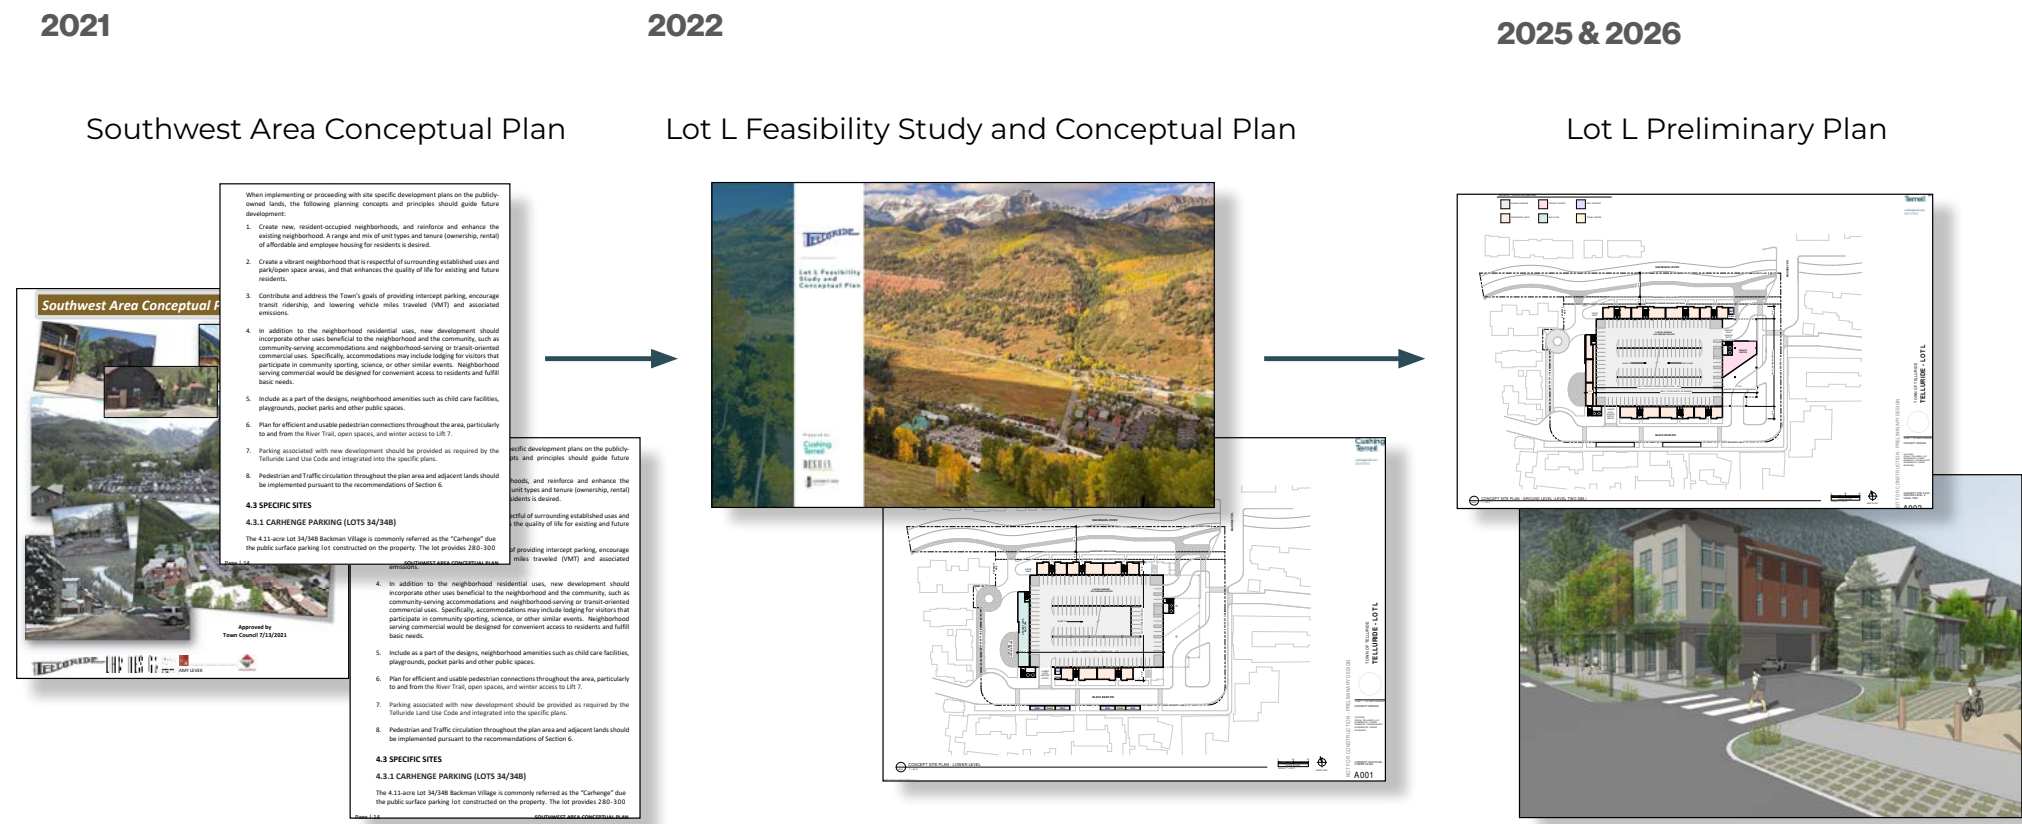

DEVELOPMENT OBJECTIVES FROM 2025 CHAIR 7 NEIGHBORHOOD PLANNING

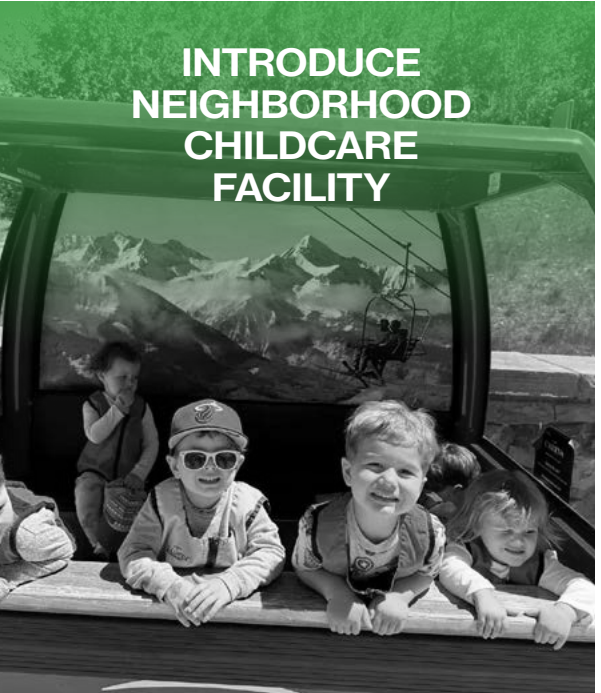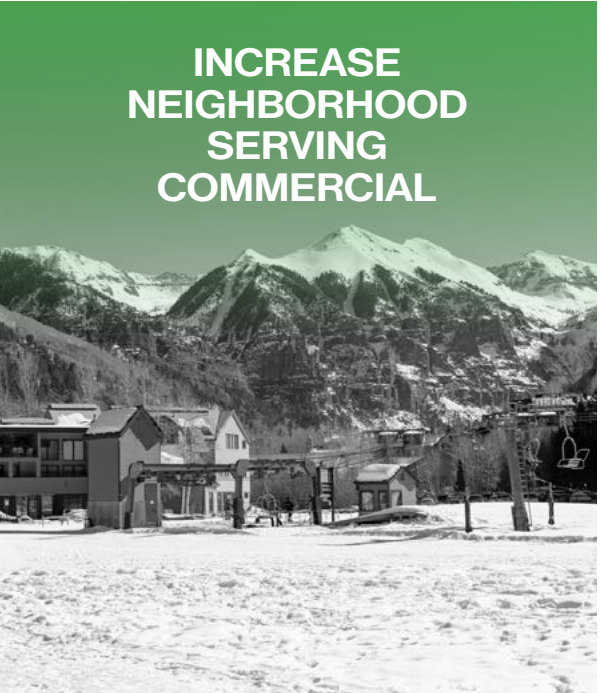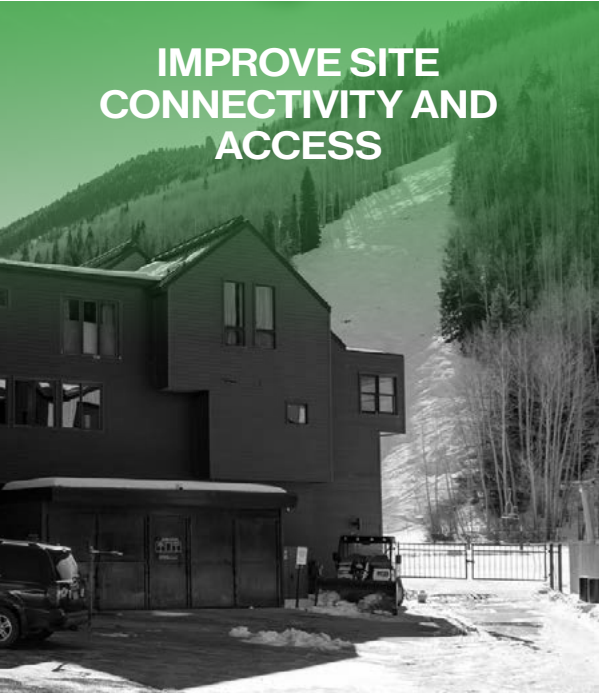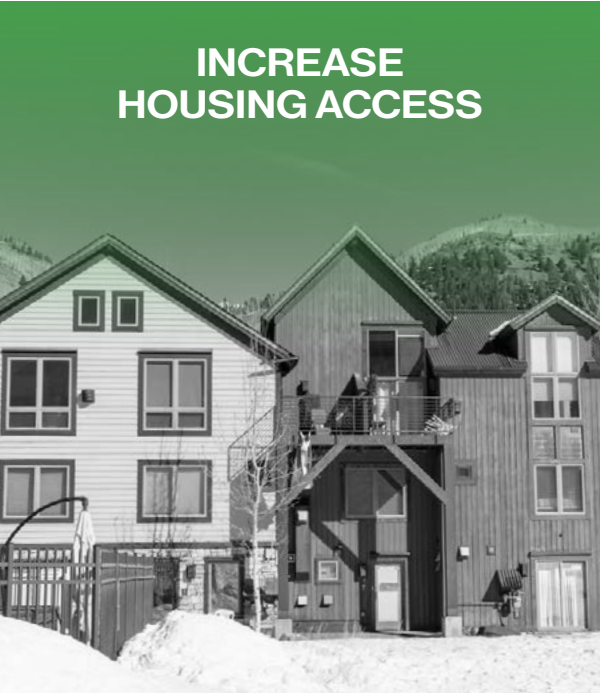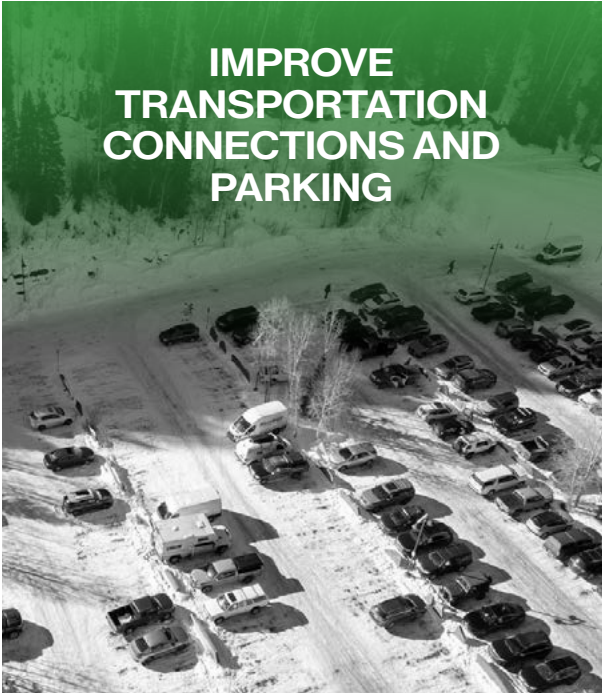

DESIGN COMMUNITY-FOCUSED AMENITIES THAT STRENGTHEN LOCAL IDENTITY

Establish public amenities that authentically reflect and reinforce Telluride’s distinct community character.

Prioritize the creation of spaces that respond to the daily needs of residents and cultivate a strong sense community by “building for locals first”.

Design for a comprehensive mix of community-oriented amenities, including childhood care facilities, play areas for families, and enhanced multi-modal connectivity.

Anchor the neighborhood with flexible opportunities for informal recreation, programmed events, and social interaction.

Provide small-scale, thoughtfully curated commercial uses will complement the local context and contribute to an inviting, pedestrian-friendly environment.

PRIORITIZE PEDESTRIAN ACCESS, CONNECTIVITY, AND MULTI-MODAL CIRCULATION

Prioritize pedestrian, bicycle, and transit access over private vehicle use, reinforcing a people-first framework that enhances safety, accessibility, and connectivity.

Envision a cohesive public realm that integrates new and existing circulation routes through multi-use sidewalks, designated crosswalks, and secure bicycle storage facilities.

Promote active transportation to reduce dependence on automobiles, including direct access to the San Miguel River Trail and targeted enhancements along Black Bear Road, Mahoney Drive, and Pacific Avenue .

Structured parking will be discreetly integrated into the site to preserve the visual quality of the neighborhood to establish this area as a well-connected, walkable neighborhood that prioritizes safety and livability for both residents and visitors.

PASSIVE CONNECTIVITY AND PASSIVE GREEN SPACE

Integrate green space as a defining element of the site by connecting to nature in daily life and capturing the the ecological and scenic richness that characterizes Telluride.

Reflects the community’s long-standing commitment to environmental stewardship, prioritizing ecological integrity, visual continuity, and passive recreation opportunities.

Establishment of development setbacks to create meaningful ecological buffers along the San Miguel River corridor.

Integrate of native landscaping throughout the development’s parks and open spaces.

Support a resilient, place-based framework that not only protects natural systems but also strengthens the social and cultural fabric of the community.

DEVELOPMENT TO COMPLEMENT COMMUNITY CHARACTER


Ensure that future development reinforces, rather than detracts from, the established character, and architectural vernacular of Telluride.

Embrace a context-sensitive design framework that carefully considers building height, massing, orientation, and site density to ensure that new construction integrates harmoniously with its surroundings.

Seek to preserve the town’s human-scaled built environment while allowing for incremental growth that feels authentic, proportionate, and community-driven.

Reflect a broader commitment to stewardship of the built environment, guiding growth in a way that respects the past, serves present needs, and sustains the character of the community into the future.

SITE IMPROVEMENTS SURVEY (Exhibit C)

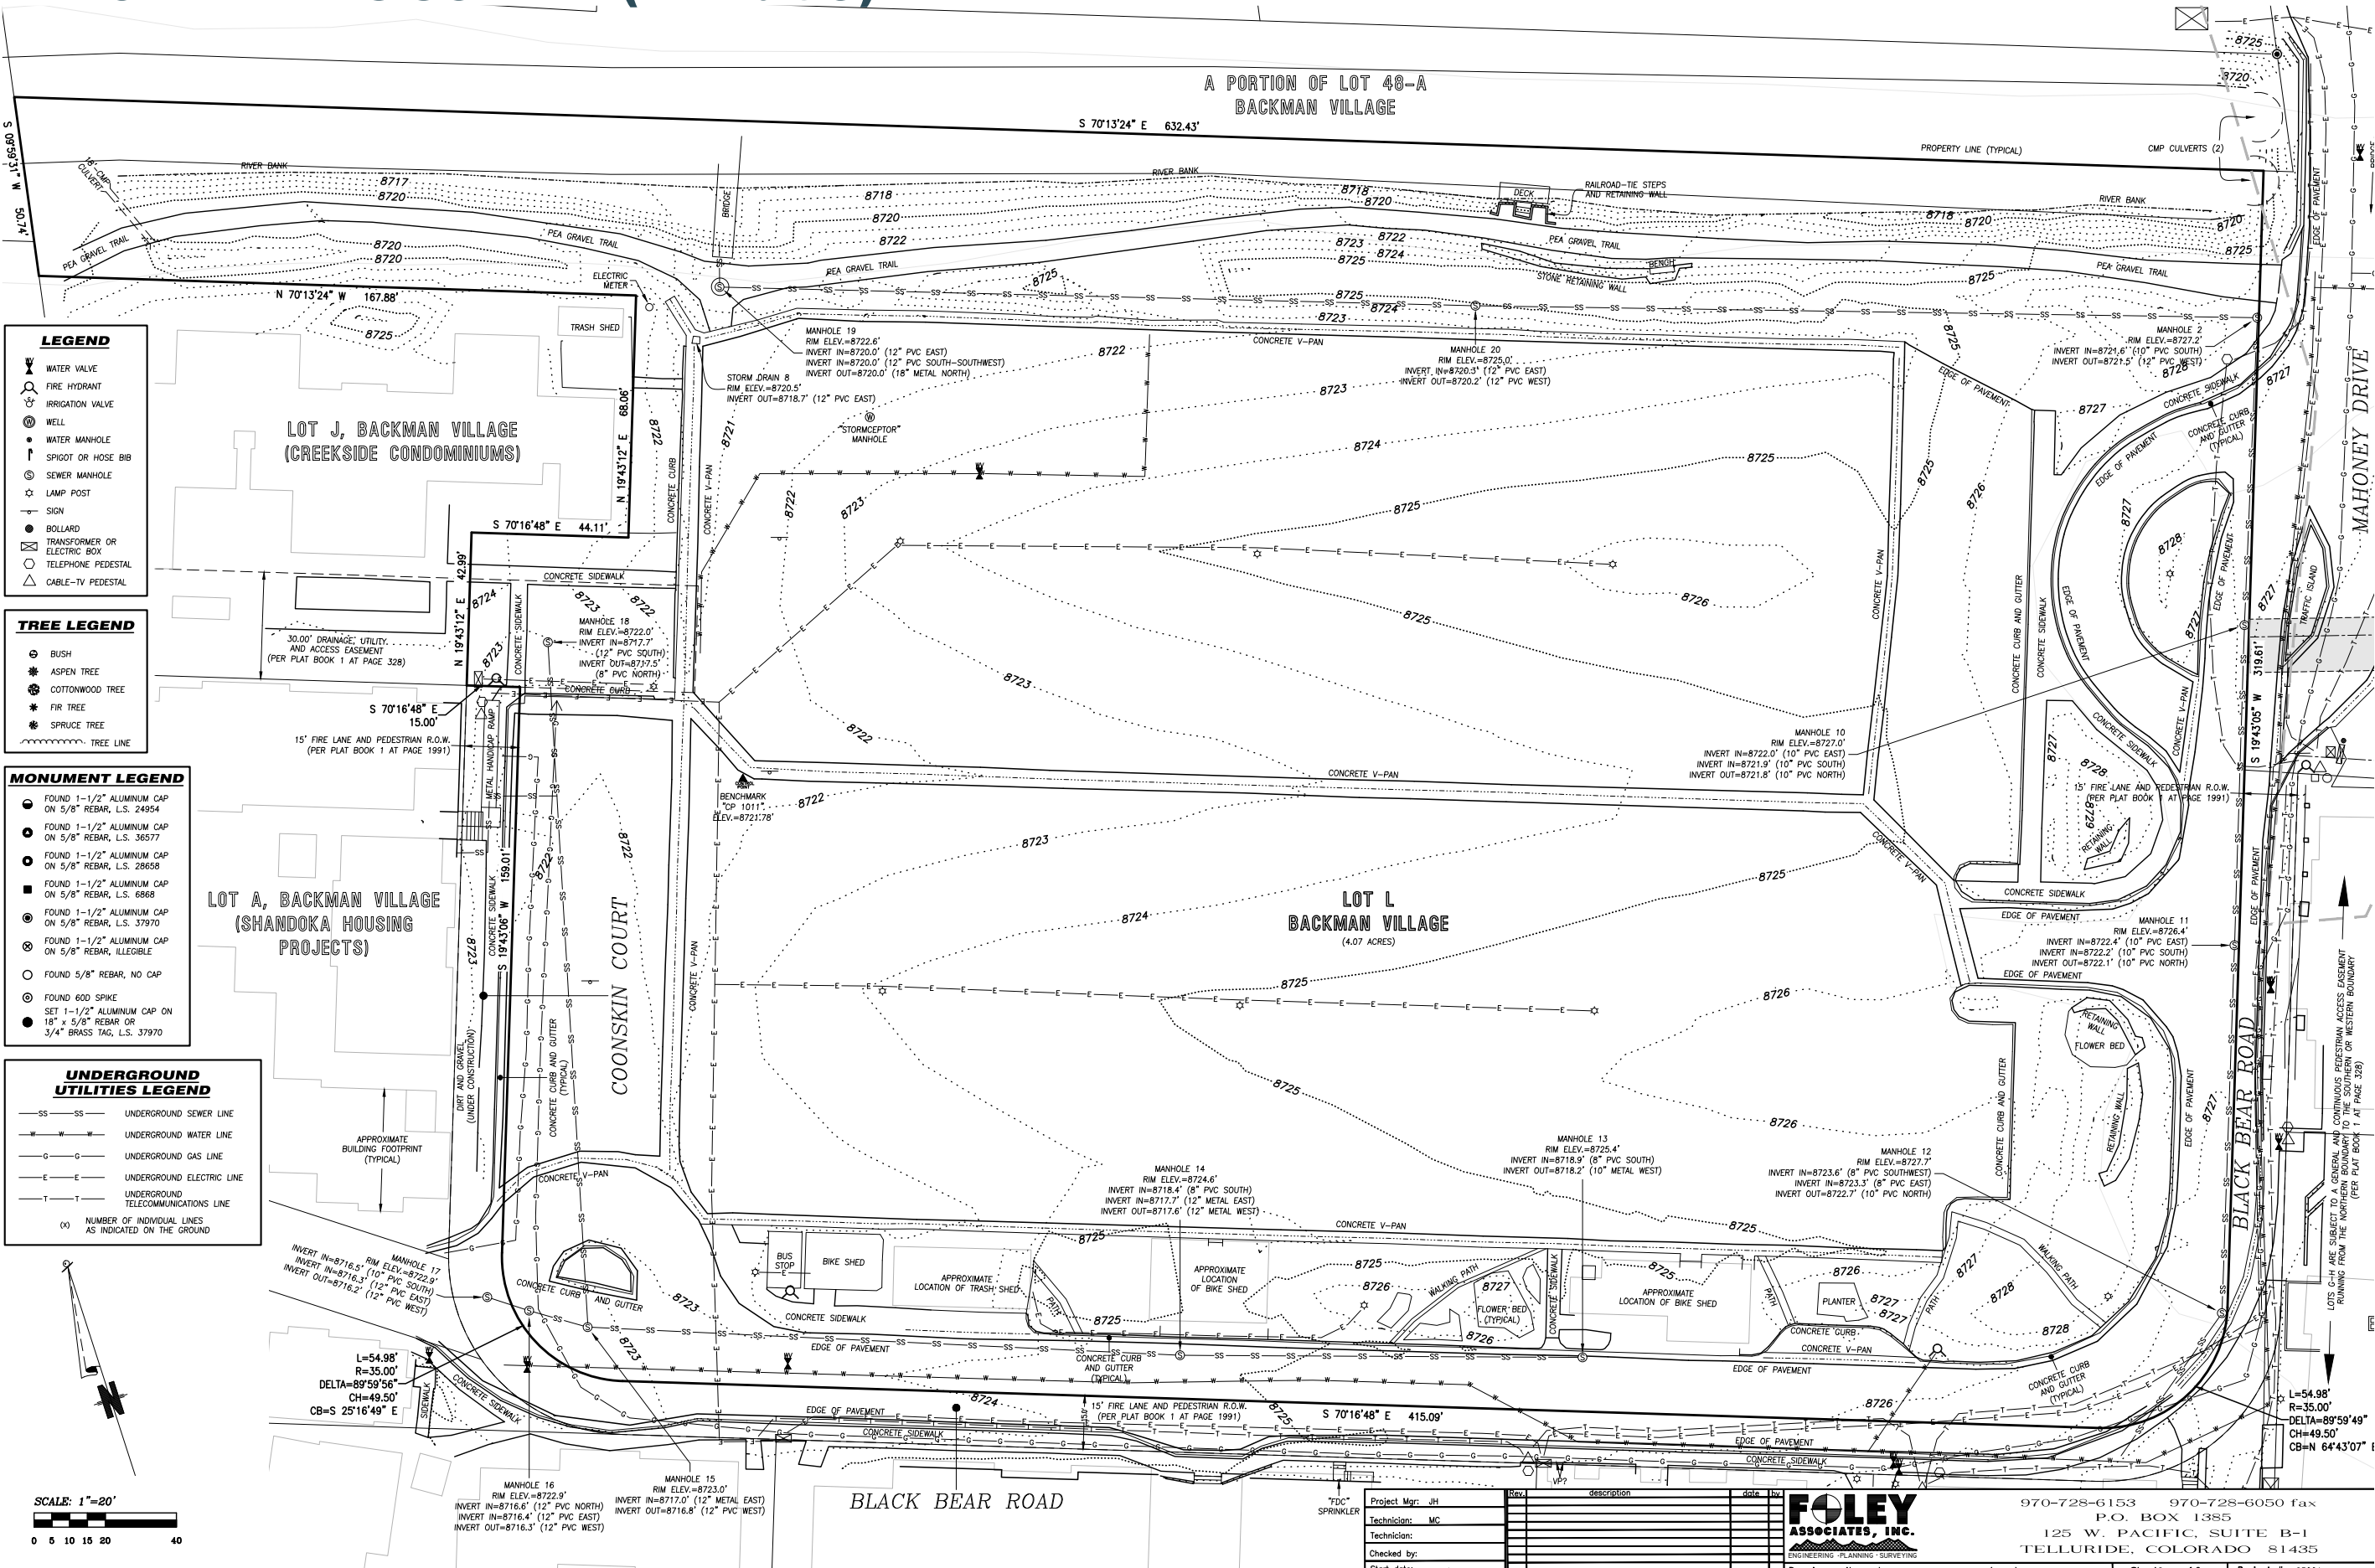

EXISTING CONDITIONS


Lot L, also known as Shandoka, is a nearly 4-acre parcel used today as a surface parking lot. It supports residents of the nearby multifamily housing complexes, as well as day visitors and users of the ski area. A portion of the property is subject to river park dedication and protection requirements along the San Miguel River, that informs future design and access. Mahoney Drive, which runs through the site, is part of the property and serves as a key circulation corridor. With good access to existing transit, the ski area, and surrounding neighborhoods, the site is central to ongoing planning discussions focused on redevelopment opportunities.

LINETYPE LEGEND

- EASEMENT LINE
- UTILITIES - WATER LINE
- UTILITIES - SEWER LINE
- UTILITIES - ELECTRICAL LINE
- UTILITIES - TELE/COMM LINE
- UTILITIES - GAS LINE
- TOPO LINE - MAJOR
- TOPO LINE - MINOR

LEGEND

- A PEDESTRIAN RIVER CROSSING
- B RIVER PUT-IN PLATFORM
- C BOULDER RETAINING WALL
- D ASPHALT PARKING LOT
- E DROP-OFF LANE
- F VEHICULAR ROUNDABOUT
- G BIKE AND TRASH ENCLOSURES
- H VEHICULAR PULL-OFF
- I BUS STOP
- J PARKING LOT ENTRY
- K MAHONEY BRIDGE
- L CIMARRON CONNECTION

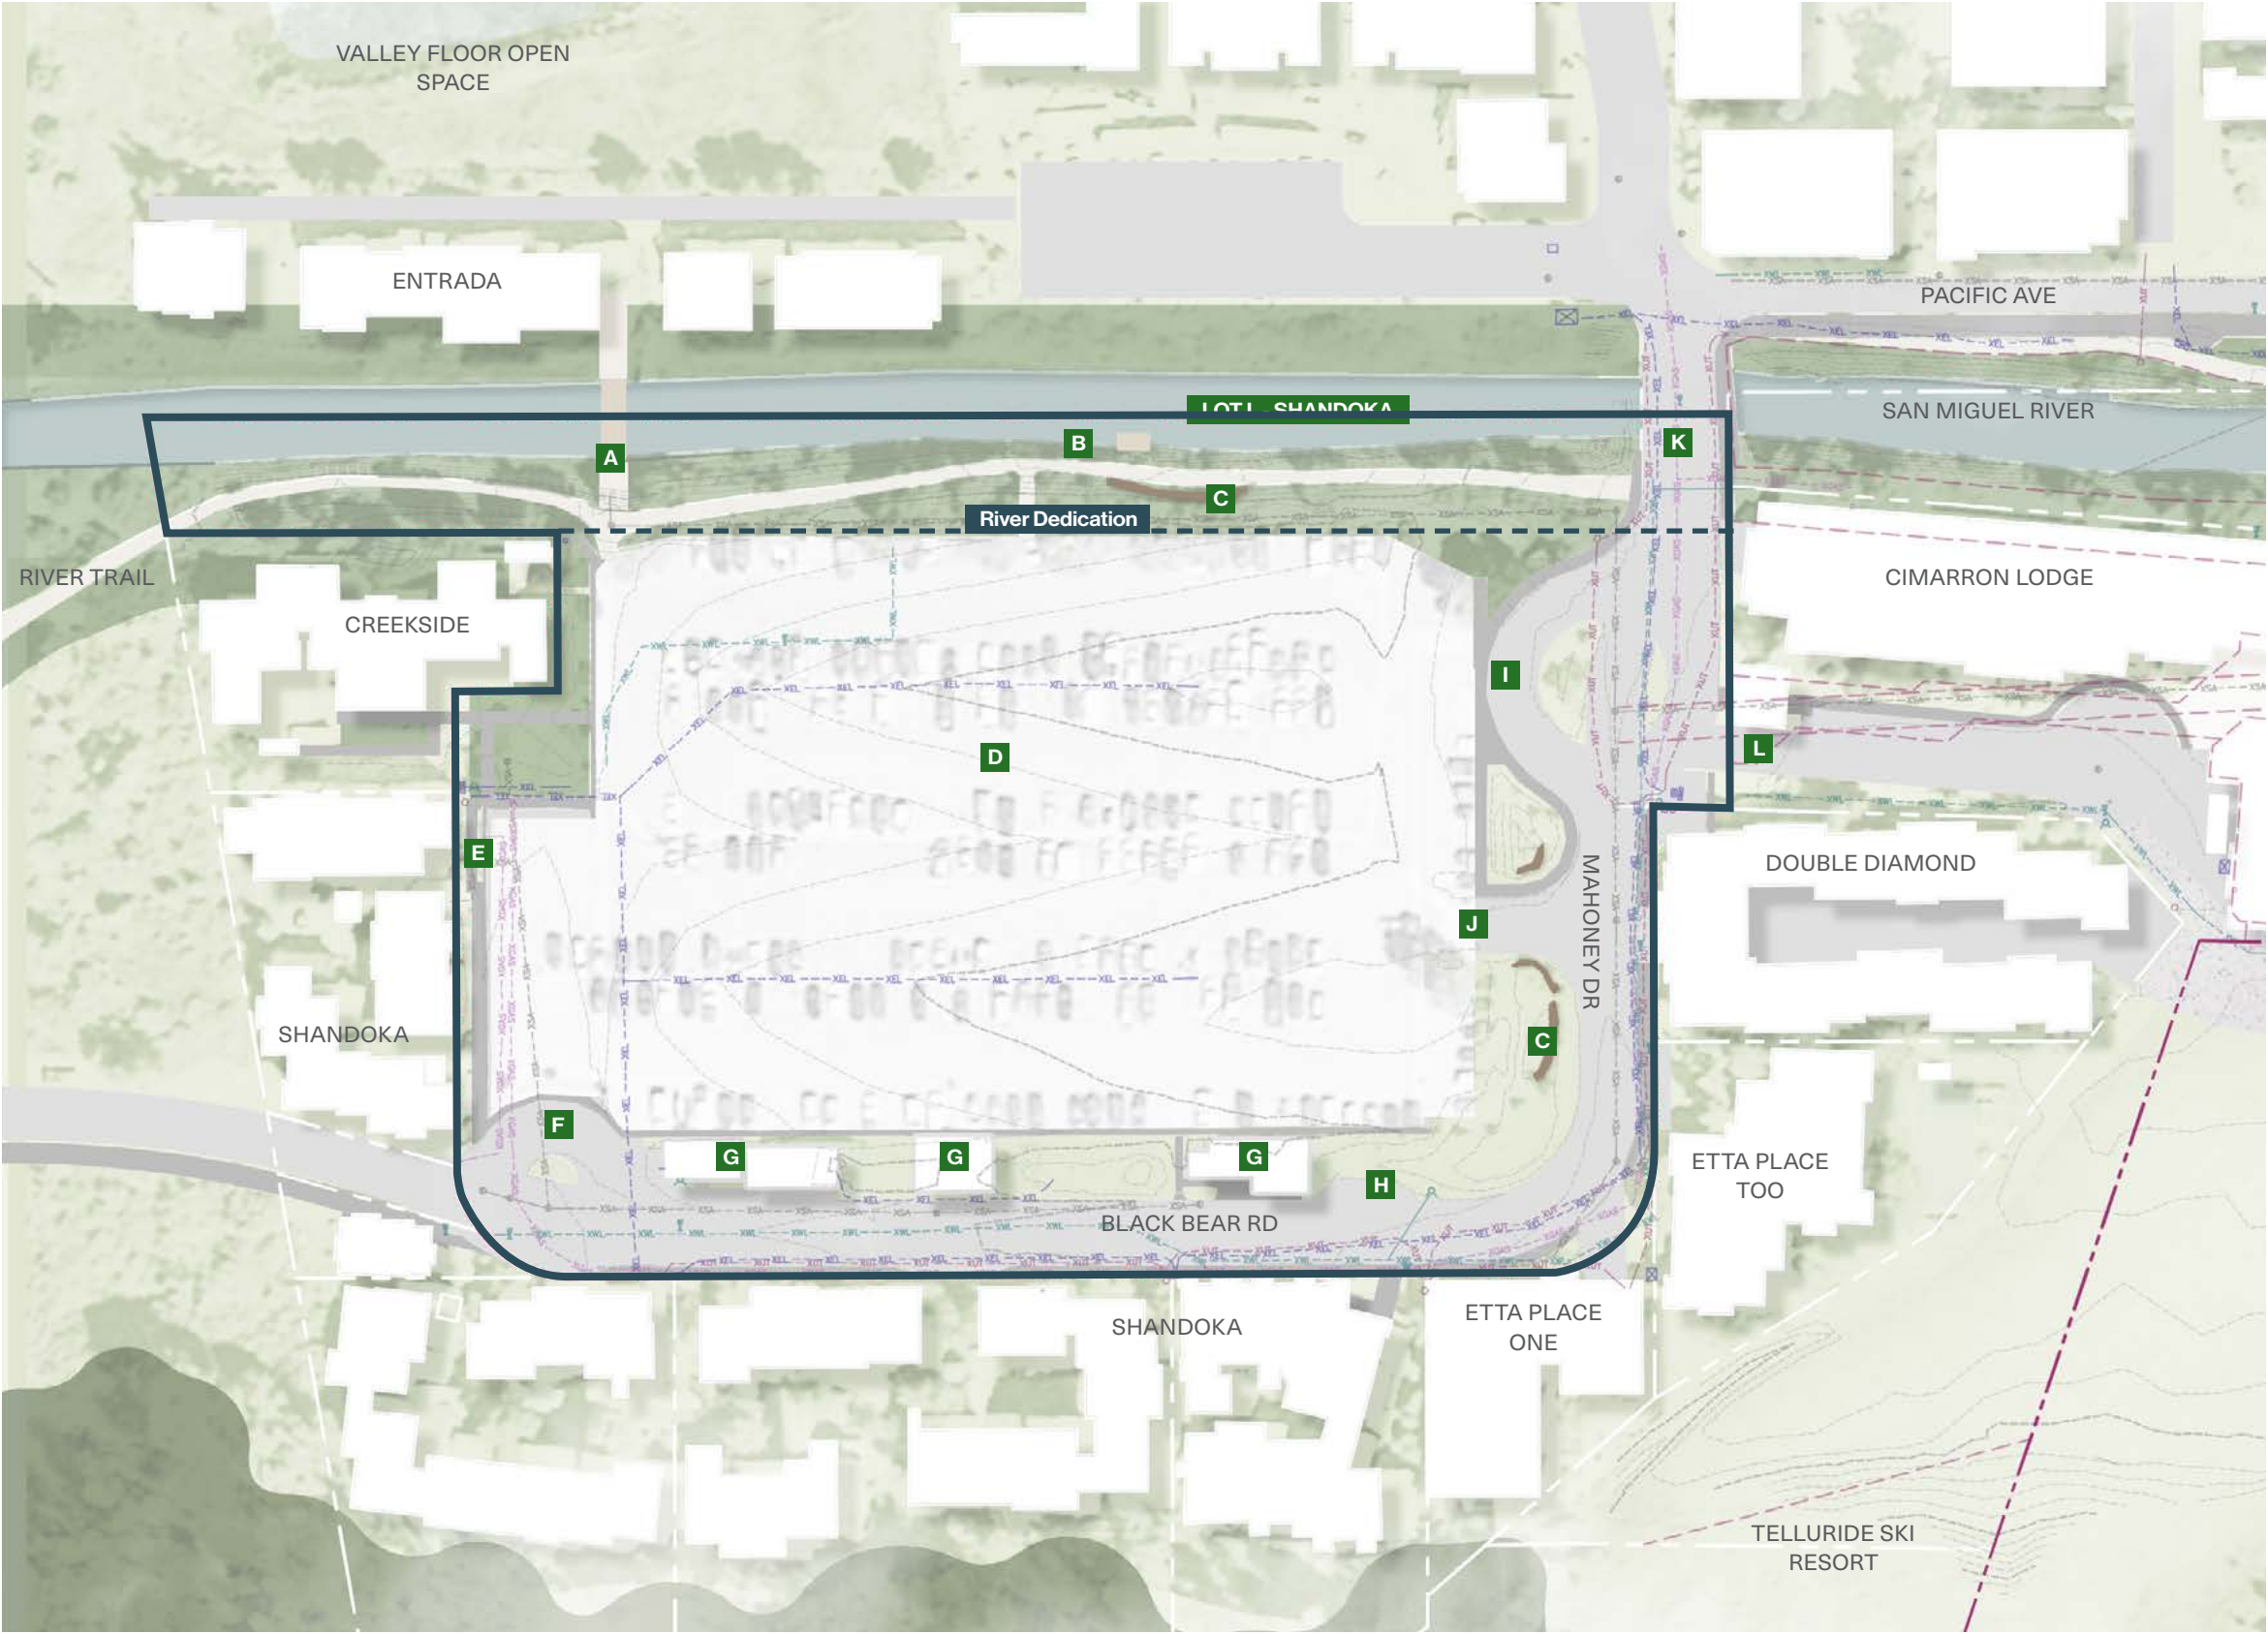

SITE PHOTOS



Site Access

Primary access to the site is provided via the Mahoney Bridge, which serves as a key connection point to the Southwest area of Town. The current arrival along Mahoney Drive includes a designated bus turnaround area, as well as a curb cut that provides vehicular entry into the existing parking lot.



Views

The site offers dramatic views of the surrounding mountain landscape and showcases the natural beauty that defines the region. Protecting and enhancing these views is a key consideration in the planning and design process.



Existing Use

Currently, the site functions as a surface parking lot that serves both residents of the Shandoka housing complex and visitors to Telluride. It provides essential parking capacity supporting the mobility needs of the local residents and tourists.




Existing Structures

A roofed shelter with bike storage and a trash enclosure currently exist on-site.



San Miguel River


Along the northern edge of the site, the San Miguel River Trail serves as a key connector.

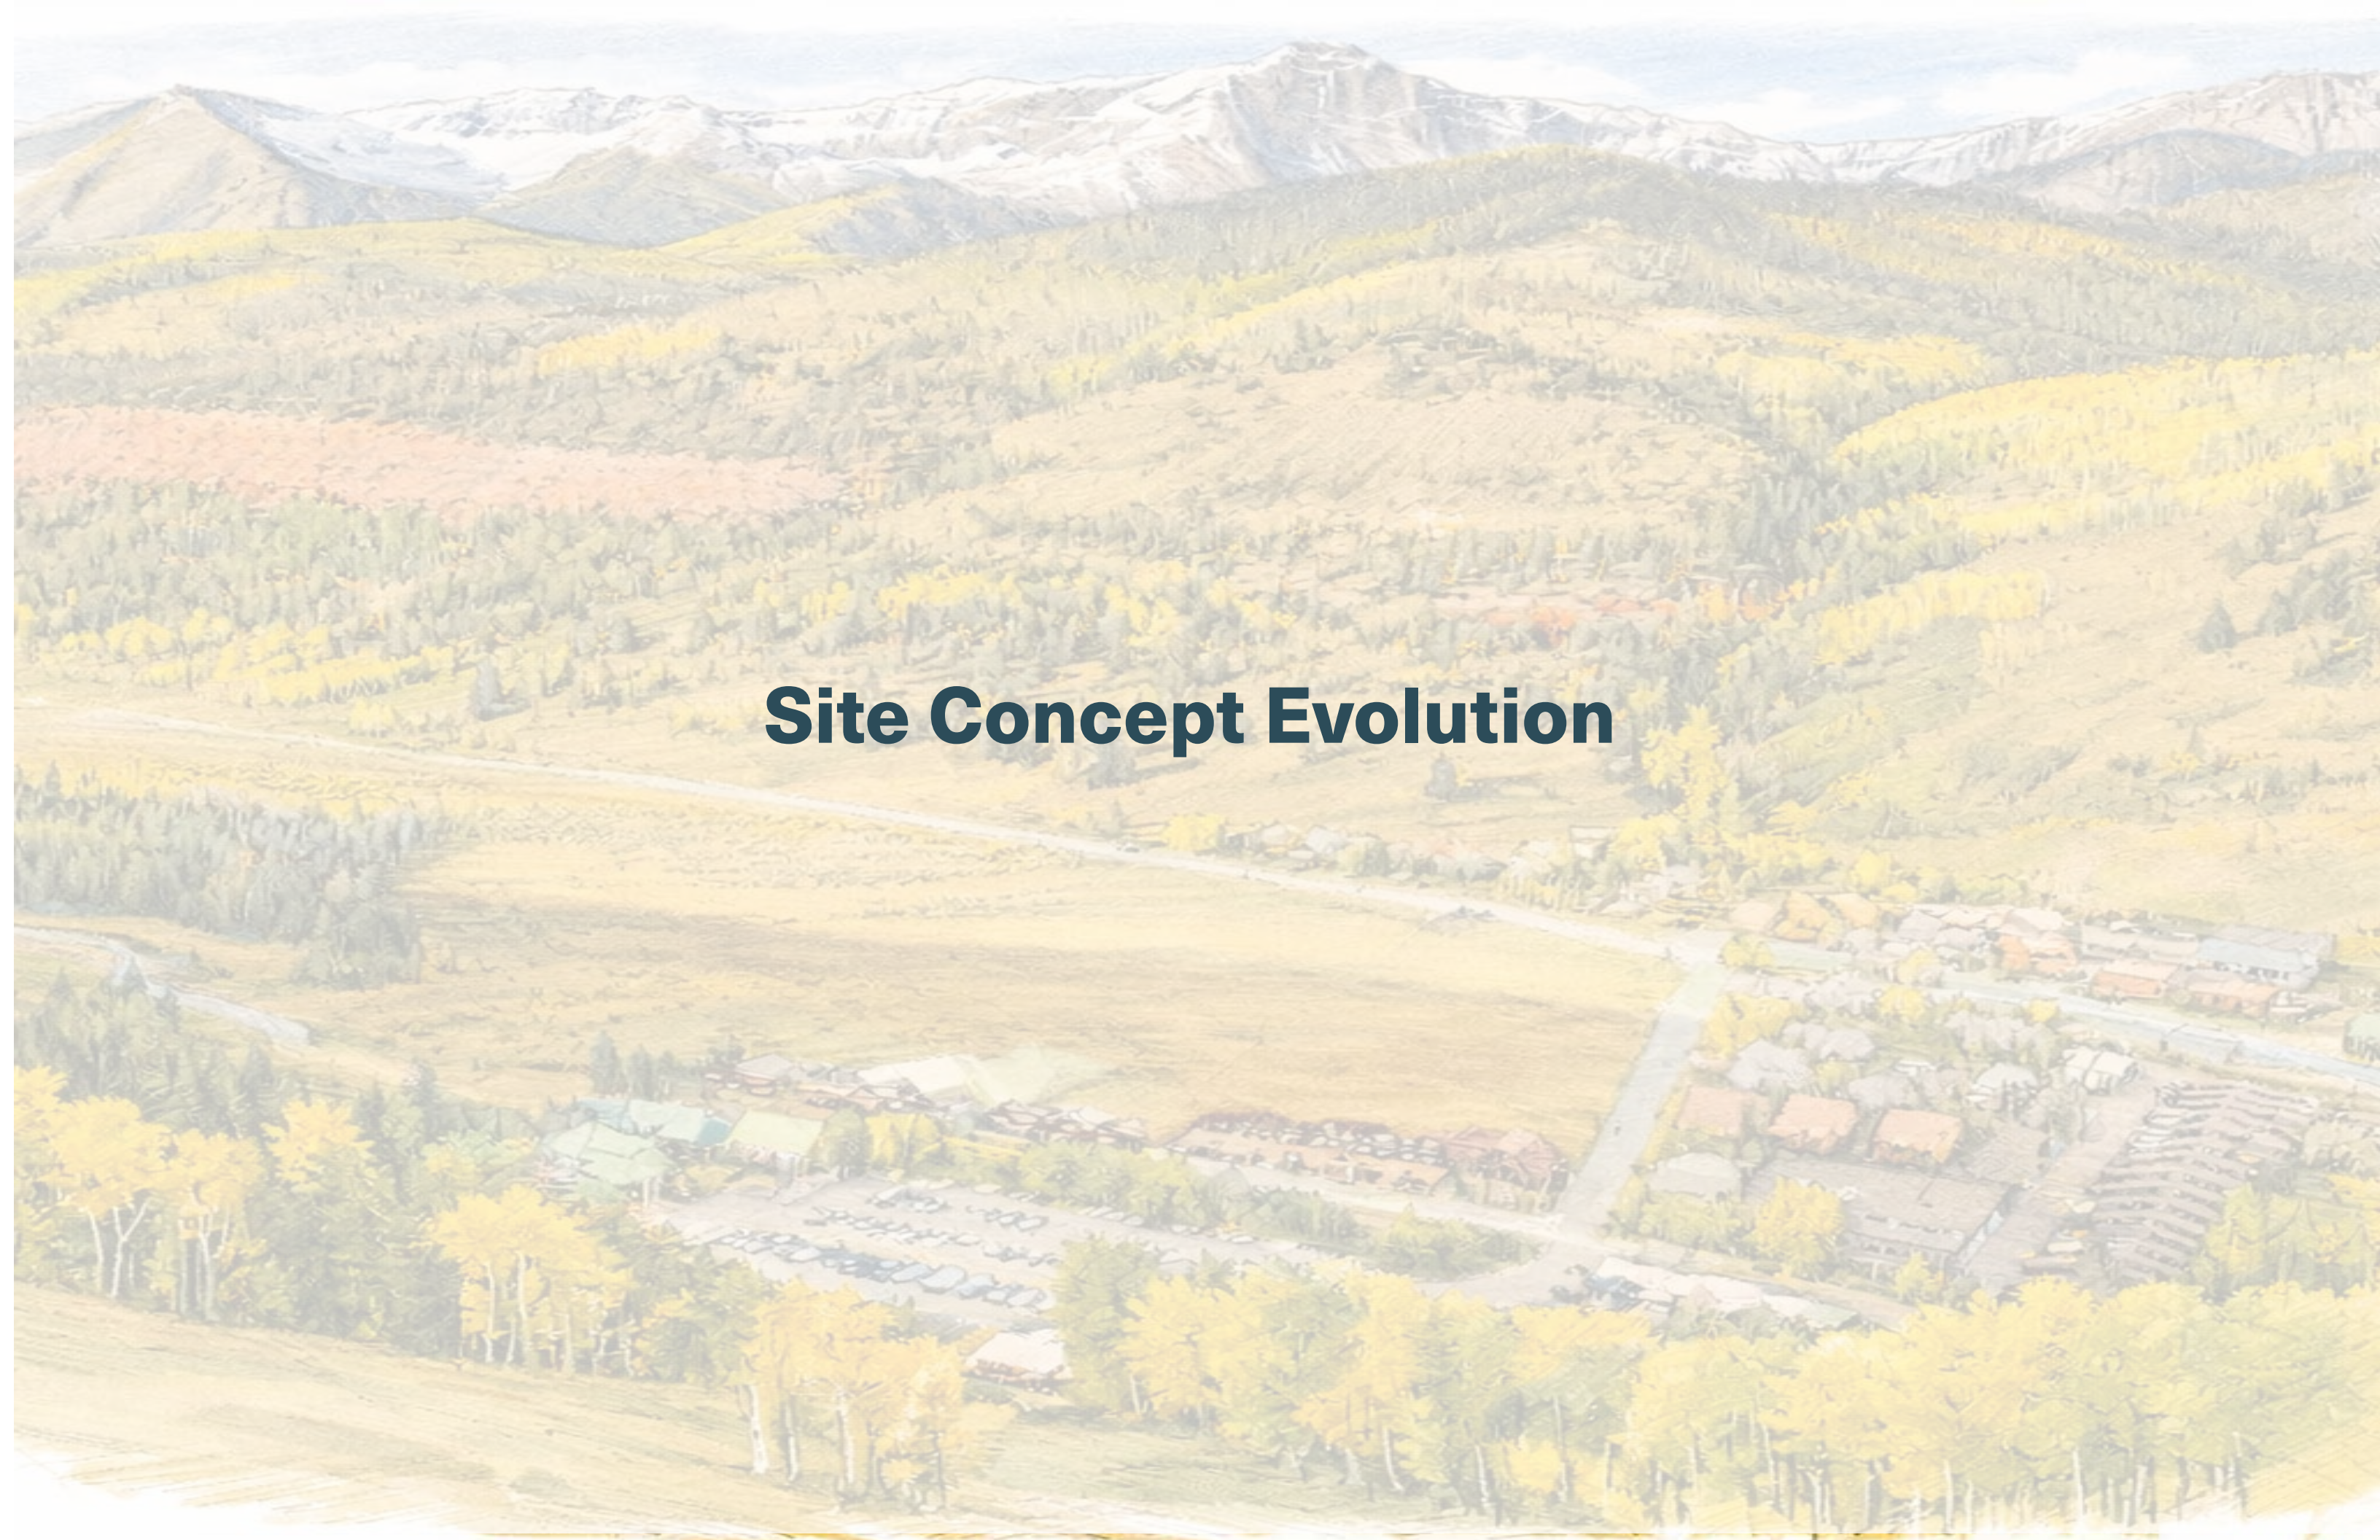An aerial photograph of a mountainous landscape. In the background, a range of mountains with patches of snow or light-colored rock rises against a blue sky. The middle ground consists of rolling hills covered in dense forest, with some areas showing autumnal colors of yellow and orange. A wide, flat valley floor is visible, featuring a small town or village with several buildings and a parking lot. A road or path runs through the valley, and a river or stream is visible on the left side. The foreground shows more forested slopes.

Site Concept Evolution

LOT L FEASIBILITY STUDY AND CONCEPTUAL PLAN

2022-2023

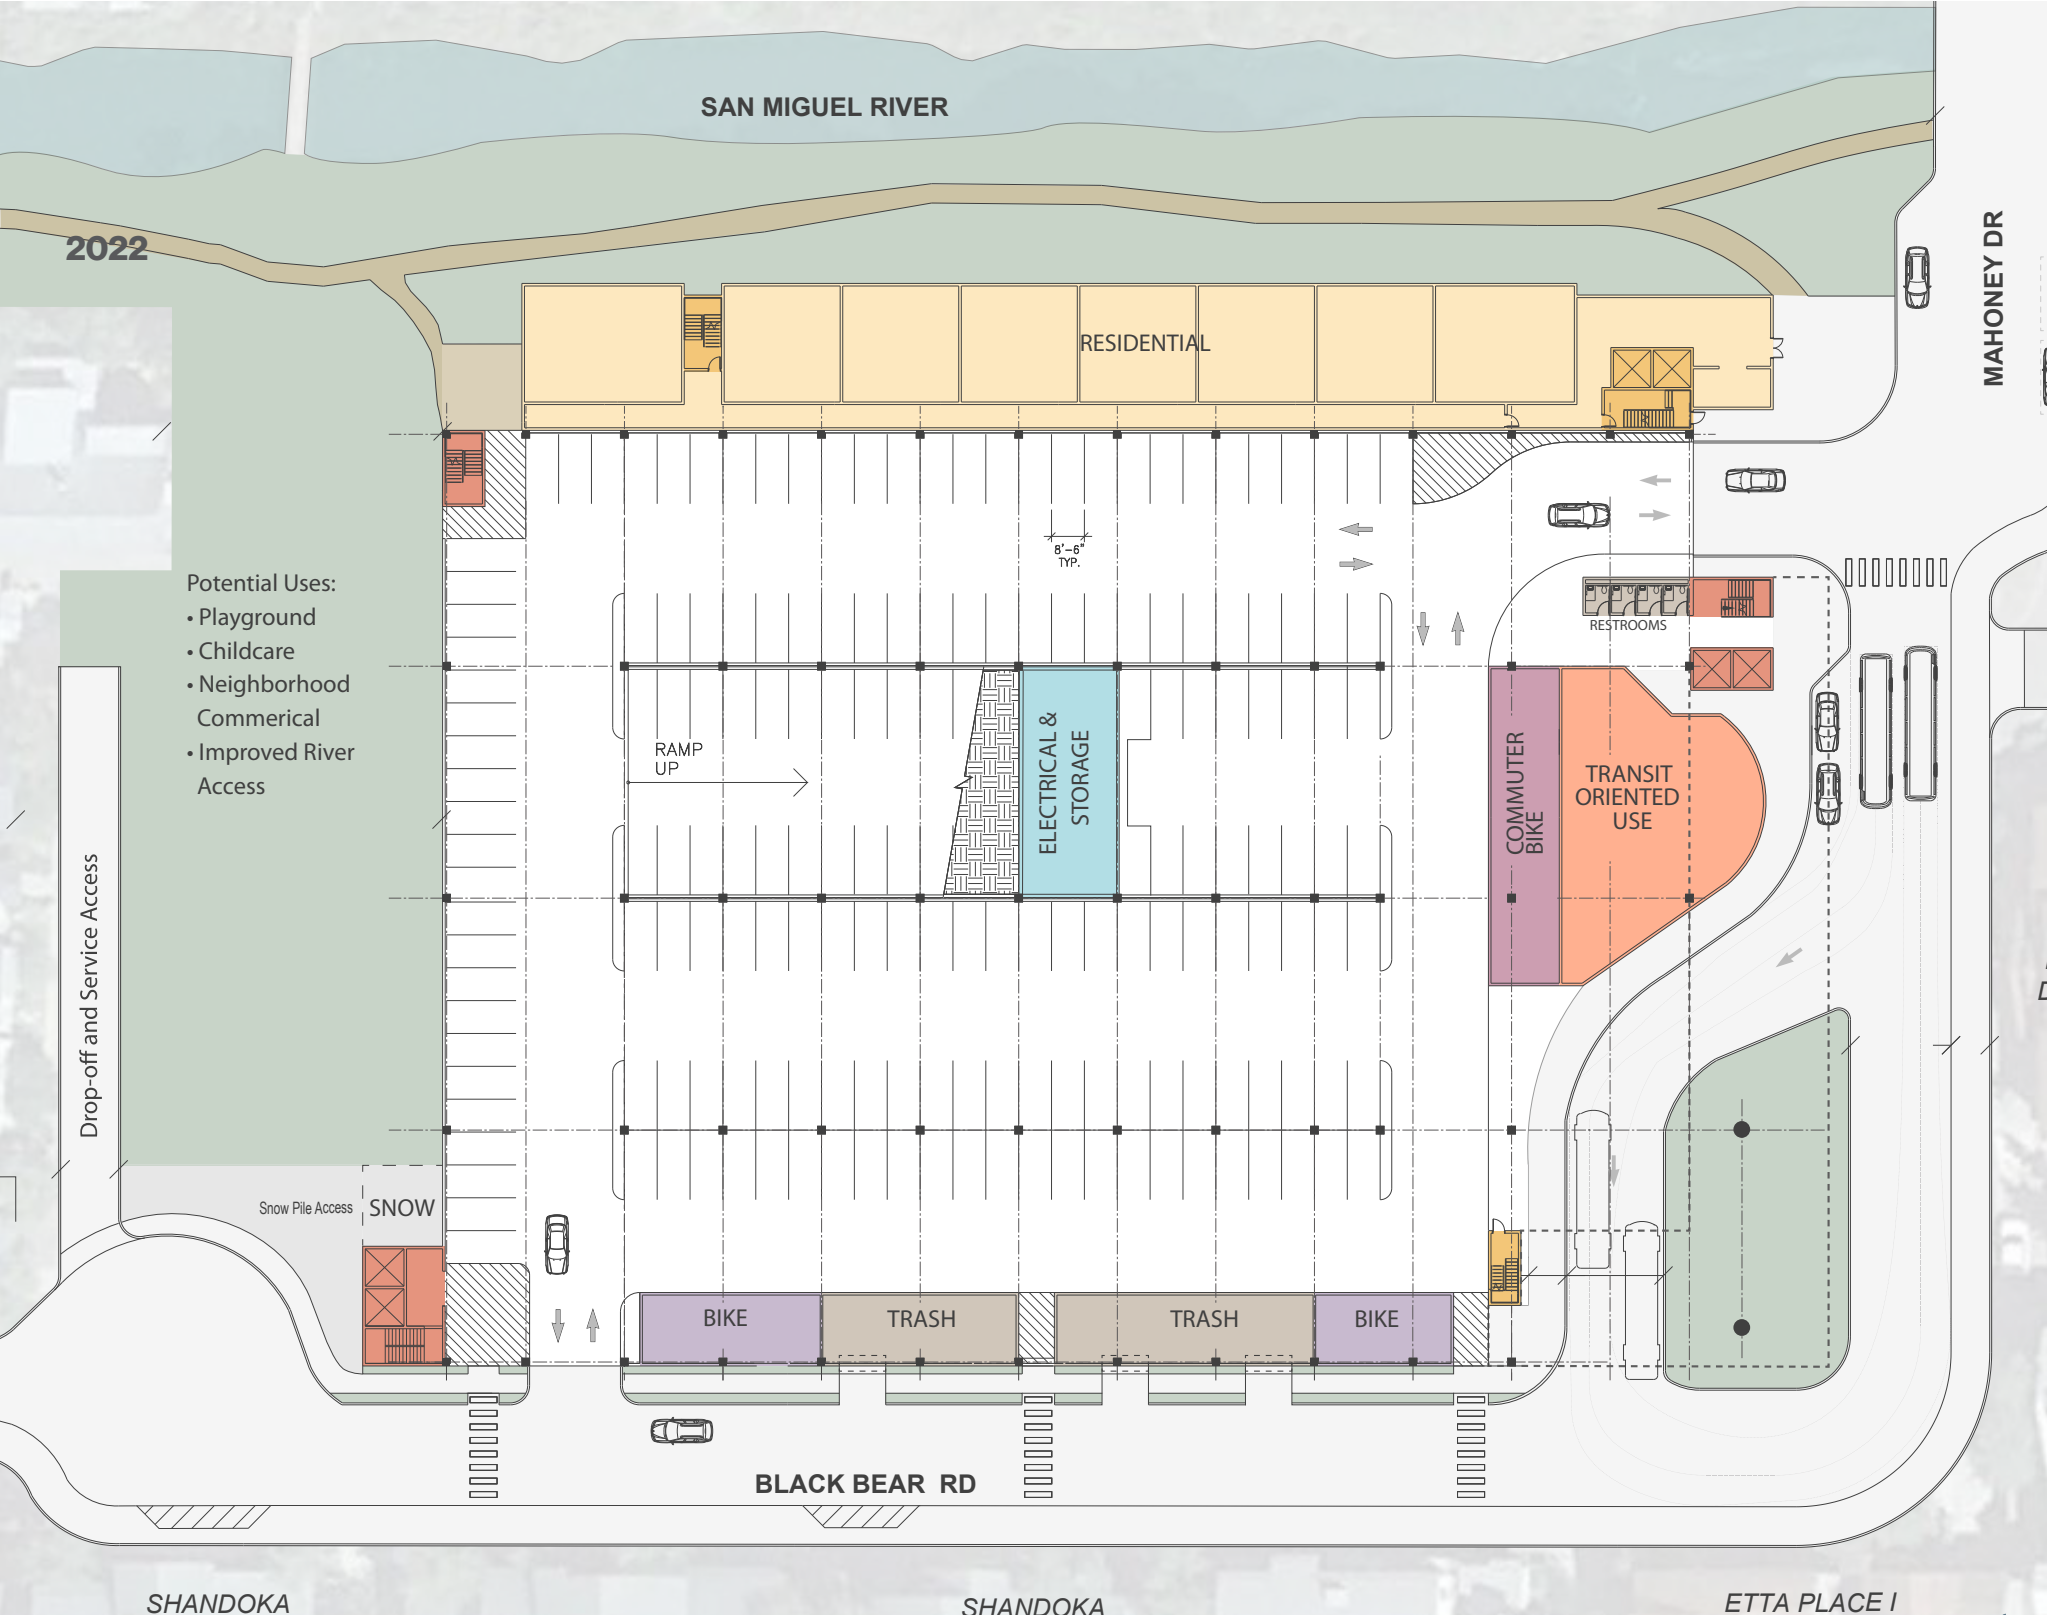


- FEEDBACK FROM THE FEASIBILITY STUDY**
- Add and improve the neighborhood amenities such as childcare, playgrounds, pocket parks and public spaces.
 - Additional amenities are desirable (gym, restaurants).
 - Consider additional community uses on the ground floor for neighborhood/residents.




2025 ALTERNATIVE 1

Summer 2025

GROUND LEVEL

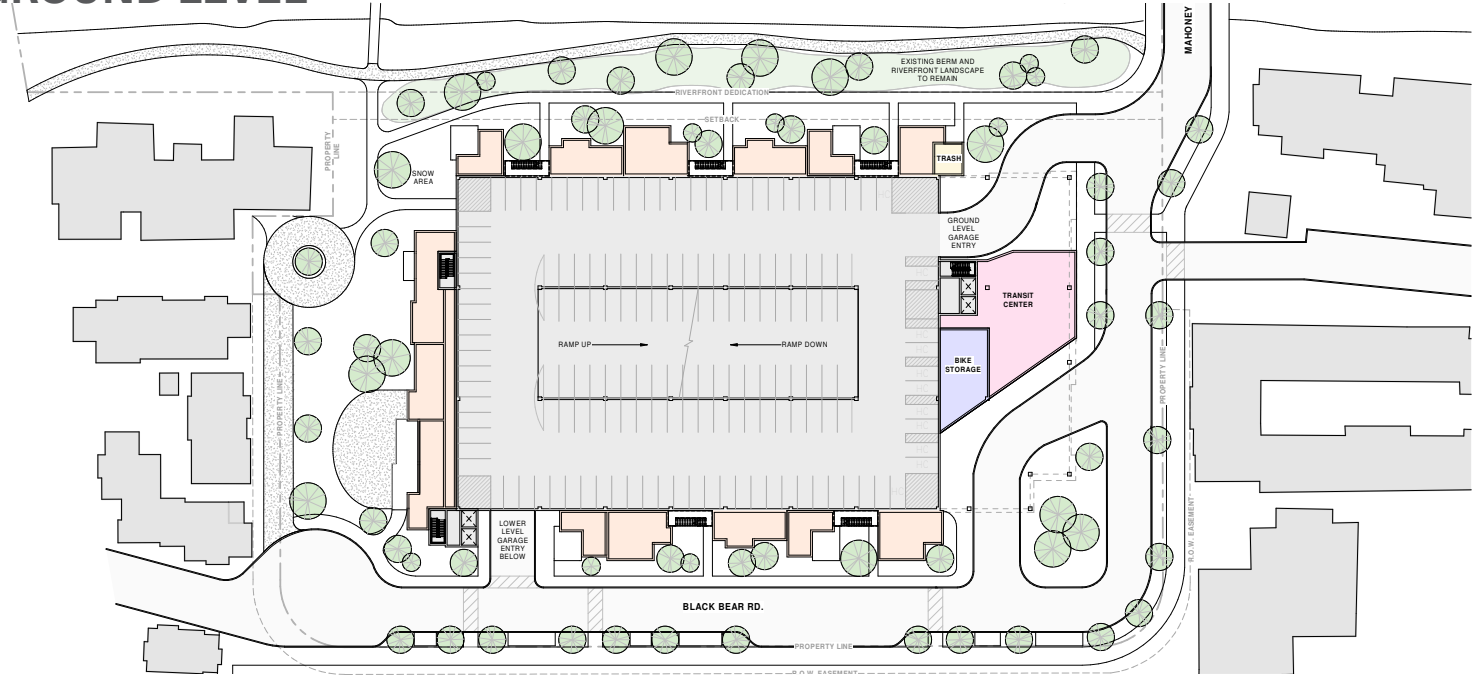

UPPER LEVEL

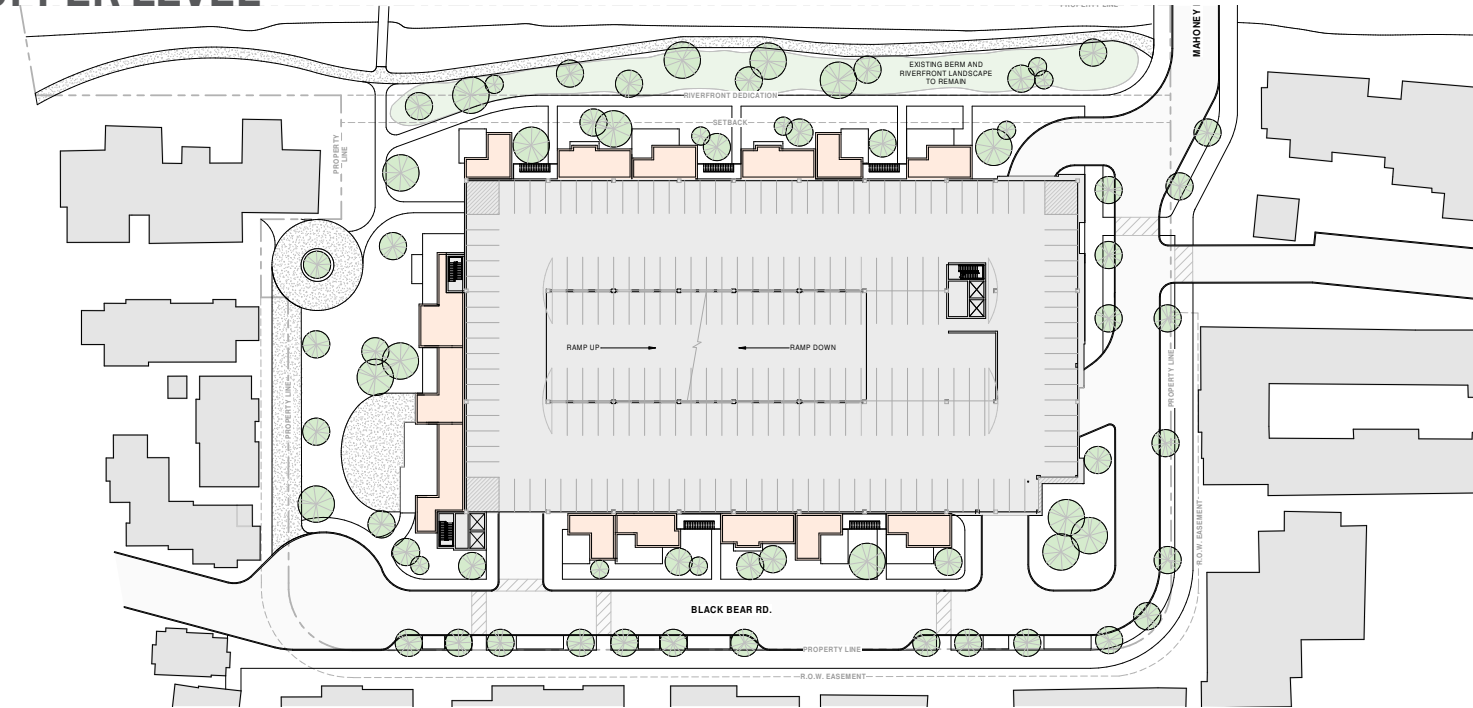


FEEDBACK FROM Town Council, Public Input and HARC Worksession

TAKEAWAYS


- Break the concept into multiple structures.
- Improve pedestrian scale (increase one & two-story elements, decks, porches, etc..).
- Provide a unique, simple, and contextual solution for the expression of the Transit Hub.
- Building modules should reflect distinct, architectural character.
- Confirm the concept is providing the appropriate bike and trash storage to meet/exceed the current demand, including additional bike and trash storage required for new housing. Consider moving bike/trash storage into the new garage structure on the north side of Black Bear Rd.
- Considering the top floor elevation of the structure, in particular, the snow plowing required.
- Consider housing on the upper level to shield the top elevation and mitigate plowing.
- Consider seasonal/partial closure of upper-level ramp outside of summer months.
- Consider a portion of the parking garage (top level) as some sort of play space.
- Consider the use of Solar Panels for the top level of the structure.
- Address safe and clear pedestrian circulation and vehicular traffic flows from the Lot L site to the Lift area.
- Create a more distinct look to the transit center; this is a great opportunity to do something special at that location for a distinct facade.
- Confirm surface material treatment of emergency access lane in front of Shandoka Building F as a non-asphalt, but maintain emergency, trash, vehicle, access, and loading.
- Consider ground-floor activity along the north side of the project – potentially as a space to educate, stage, and prepare for activities, uses along the river corridor, and serve as a gateway to the valley floor. Consider space for drop-off, for equipment storage (kayak and paddleboards), stacking, etc.
- Show river ‘put in’ location on the Site Plan.
- Consider the Regional Housing Needs Assessment for the housing mix on site.
- Evaluate the feasibility of ownership opportunities for full-time locals with the project.

2025 ALTERNATIVE 2 - Presented to Town Council on 9/9/25


BELOW
GROUND
LEVEL

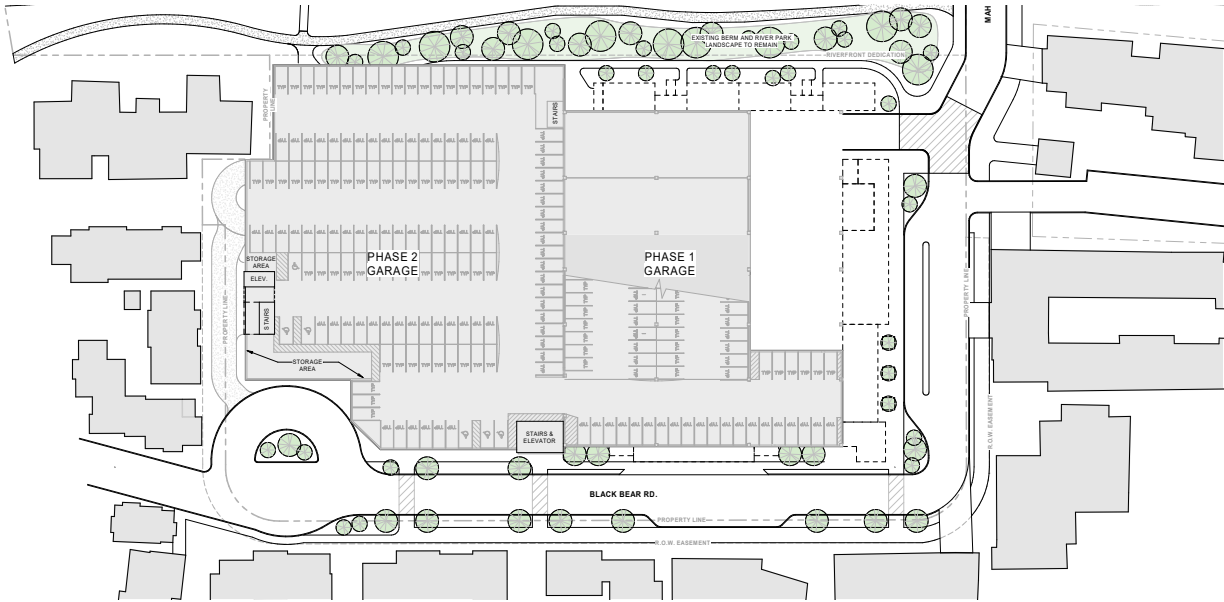

LOWER
LEVEL

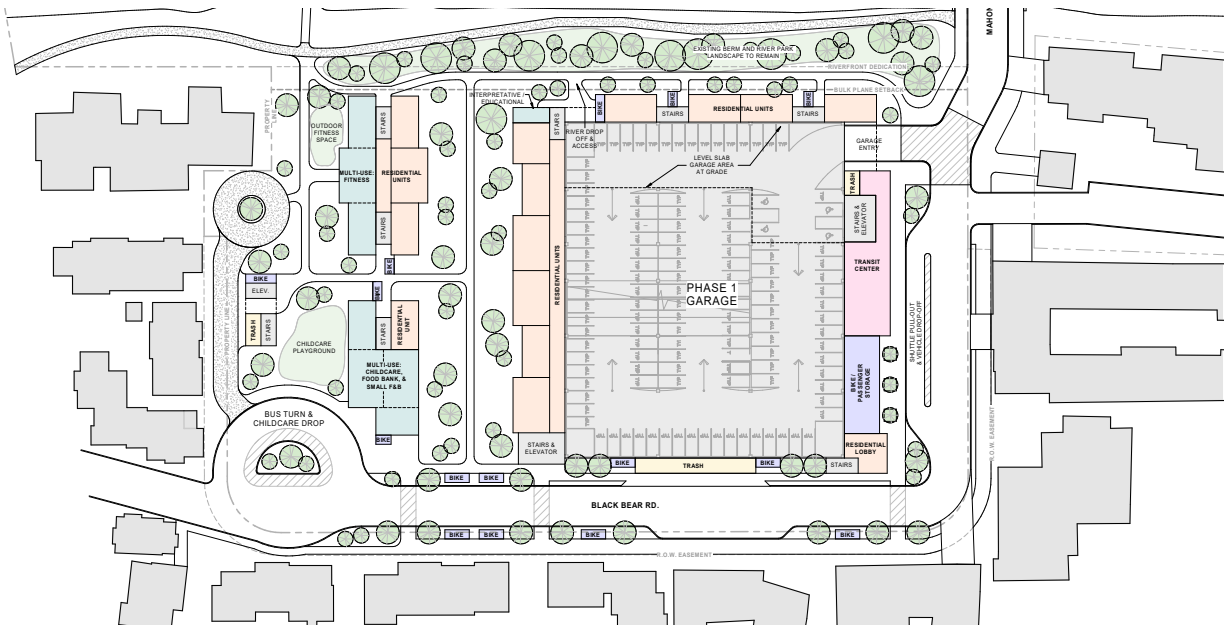

UPPER
LEVEL

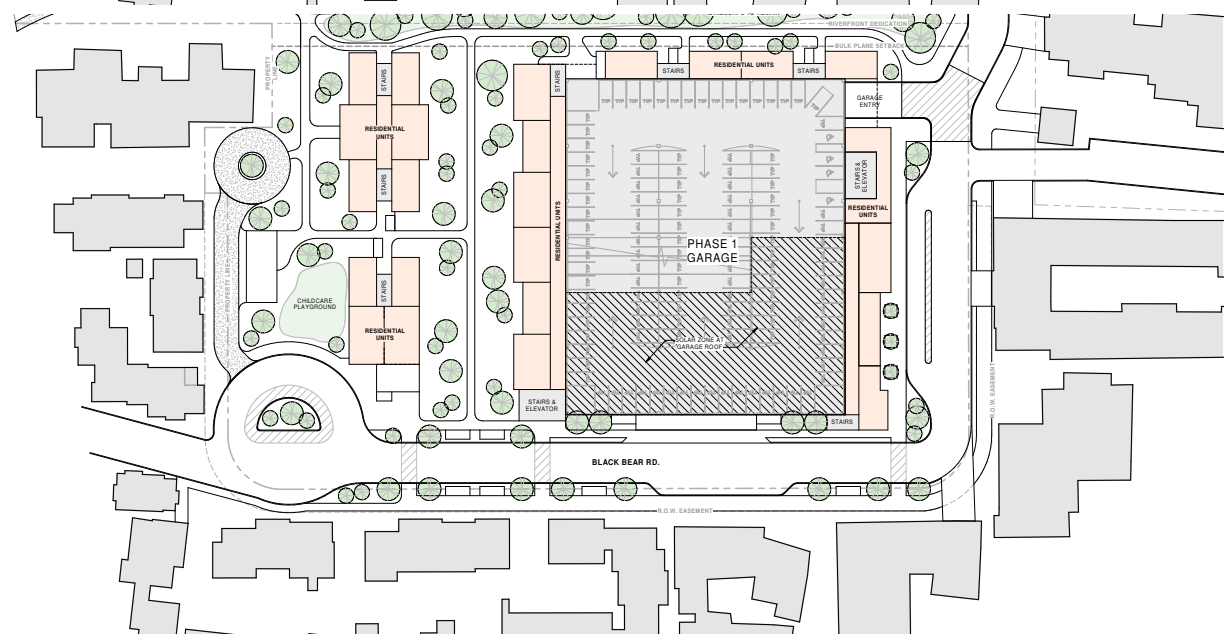

TOWN COUNCIL WORKSESSION - SEPTEMBER 9, 2025

A Worksession was held on September 9, 2025 to update Town Council on the Lift 7 Neighborhood Plan Project, as well as sharing an alternative site plan option ('Alternate 2') for Shandoka Lot incorporating feedback received.

TAKEAWAYS

- Ground water level impacts on construction cost and complexity, and potential below grade hydrostatic conditions in terms of existing adjacent buildings need to be more fully evaluated as the design progresses.
- Phasing of Lot L will need to be further analyzed with the key goal being the fast efficient delivery of the Phase 1 Parking Garage to minimize the parking impact on existing residents.
- The design direction indicted in Alternative 2 is preferred over Alternative 1. More cost information is needed to effectively evaluate Alternative 2 in comparison to Alternative 1.
- Refining the parking garage entrance to feel less “urban.”
- Ensuring commercial-residential balance supports neighborhood vitality.
- Maintaining space for “home base” outdoor recreational uses along the north side of Lot L.
- Many future opportunities for public input and design refinement remain.
- The Council is committed to transparency, careful pacing, and balancing affordable housing, parking needs, neighborhood character, and infrastructure impacts.
- The process is still in the conceptual planning phase and no decisions have been made.
- Critical to have home-base for Valley Floor and river uses along northern property boundary of the Shandoka lot. Consider the flows and kayak drop-off.

COMMUNITY ENGAGEMENT


Community Open House on March 25, 2026

Pursuant to Town Council direction, the project team hosted a public open house at the Ah Haa School for the Arts and coffee pop-up to share the Shandoka/Lot L Alternative 2 with the community and gather feedback. The open house included both in-person and virtual participation allowing residents to review the site plan and offer their input. Overall community feedback on Alternative 2 indicated a positive direction for the project when compared to Alternative 1, particularly the introduction of additional affordable housing and the effort to break down the scale of the parking structure into 3 individual structures.

Resident concerns were heard through one-on-one conversation and comments cards. Major themes include a desire for more community-oriented spaces, expanded amenities for residents, and opportunities for gathering and outdoor activity. Input also reinforced the importance of prioritizing affordable housing, strengthening transit connections, and creating a site that feels welcoming and integrated into the neighborhood context.

This feedback directly informed the evolution of an Alternative 2B, which further refined the development into 4 buildings (from 3) to reduce building mass, prioritize the pedestrian experience, and strengthen community spaces. The result is a more responsive, community-driven design that builds on the strengths of Alternative 2 while addressing local priorities.

The individual buildings in Alternative 2B, shown herein, more closely aligning with Telluride's historic grid and scale. The plan maintains the neighborhood park as a public amenity while incorporating more defined private spaces for residents. It also reinforces connectivity to the surrounding community, including improved links to downtown and the river corridor, with dedicated access points such as kayak access to the San Miguel River.

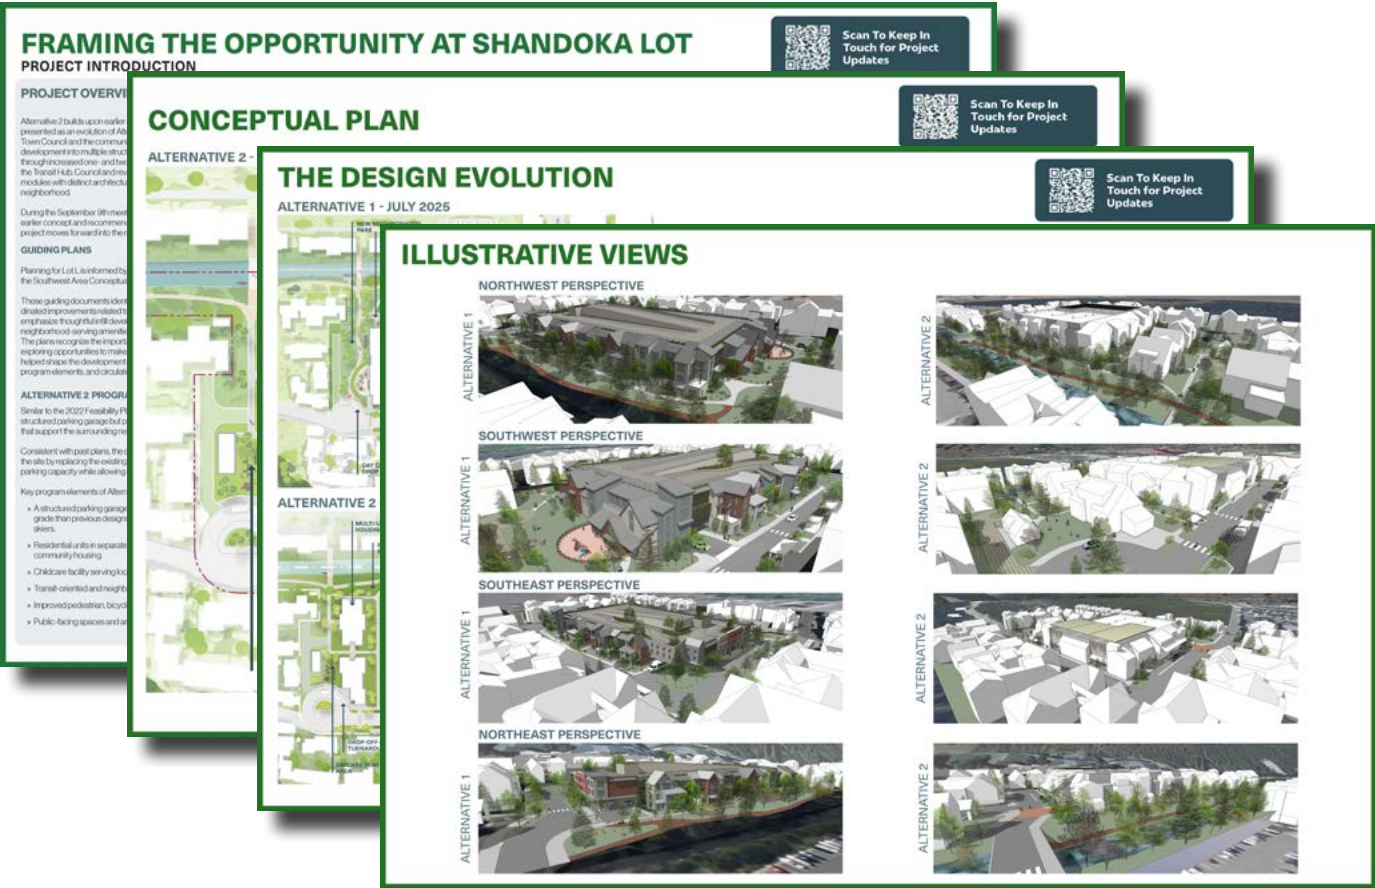


TAKEAWAYS RELATED TO DESIGN

- Overall support for the project direction.
- Alternative 2 is preferred as more inviting and visually appealing.
- Breaking up the parking structure is viewed positively.
- Added employee/affordable housing is both priority and a win.
- A well-designed transit hub (bus connections, EV charging, bike facilities) is highly desired.
- Need for local-serving amenities (gym, community spaces, dog run, food bank, etc.).
- Desire for more gathering spaces, especially for families.
- Some interest in reducing parking or repurposing space for community uses (kids space, library, etc.).
- Suggestion to charge for parking to reduce demand and encourage fewer cars.
- Interest in making the area feel more inviting, usable, and community-oriented.
- Interest in food systems/community benefit uses.




SITE PLAN EVOLUTION

Alternative 1 - July 2025

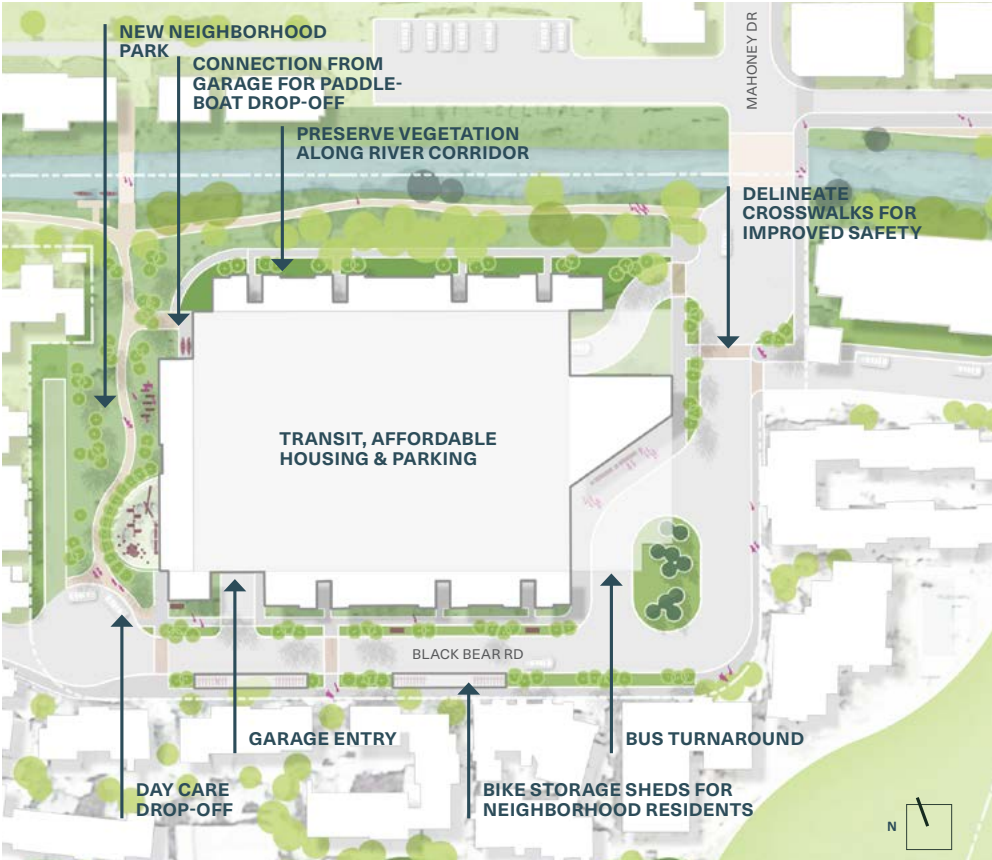


DEVELOPMENT SUMMARY:	
HOUSING	24,163 SF (Mix of affordable Residential Units)
MULTI-USE	+/- 4,000 SF (Fitness, Childcare, Interpretative/Educational, Small F&B)
TRANSIT	+/- 3,740 SF (Transit Center, Bike/Passenger Storage Area)
PARKING	+/- 900 Spaces

Alternative 2 - September 2025

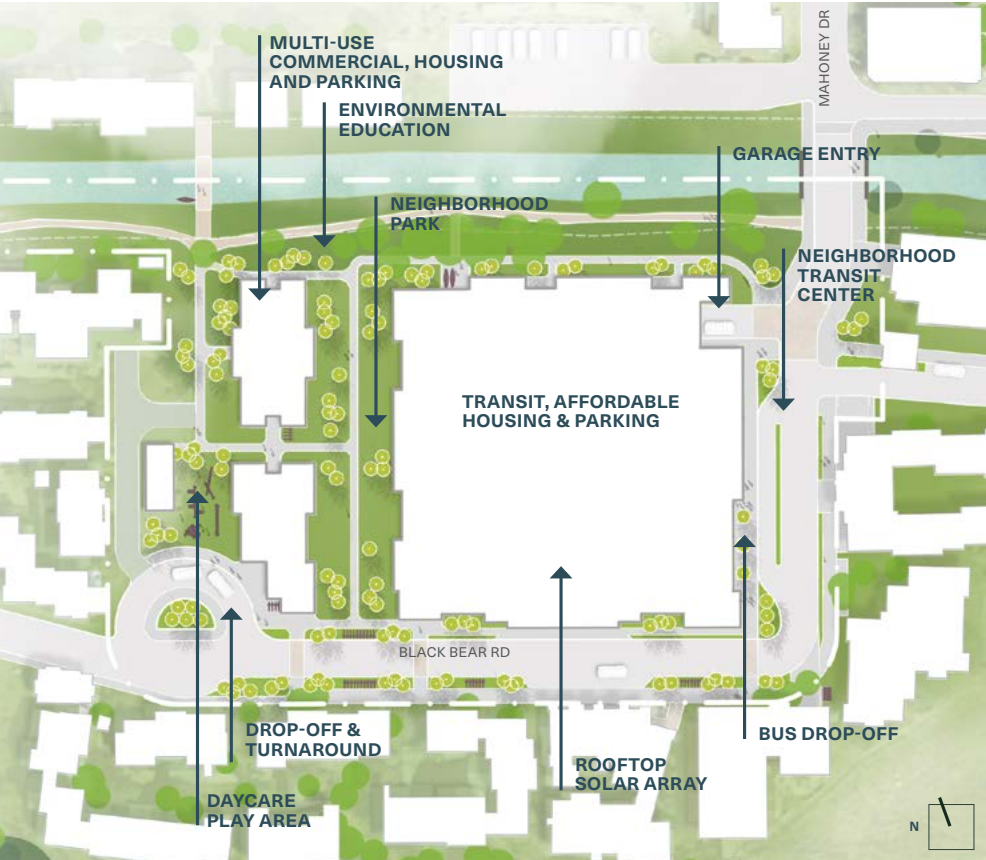

DEVELOPMENT SUMMARY:	
HOUSING	61,922 SF (Limited number of units can be free market)
MULTI-USE	+/- 5,150 SF (Fitness, Childcare, Food Bank, Interpretative/Educational, Small F&B)
TRANSIT	+/- 3,930 SF (Transit Center, Bike/Passenger Storage Area)
PARKING	+/- 900 Spaces

Proposed Concept 2B - May 2026

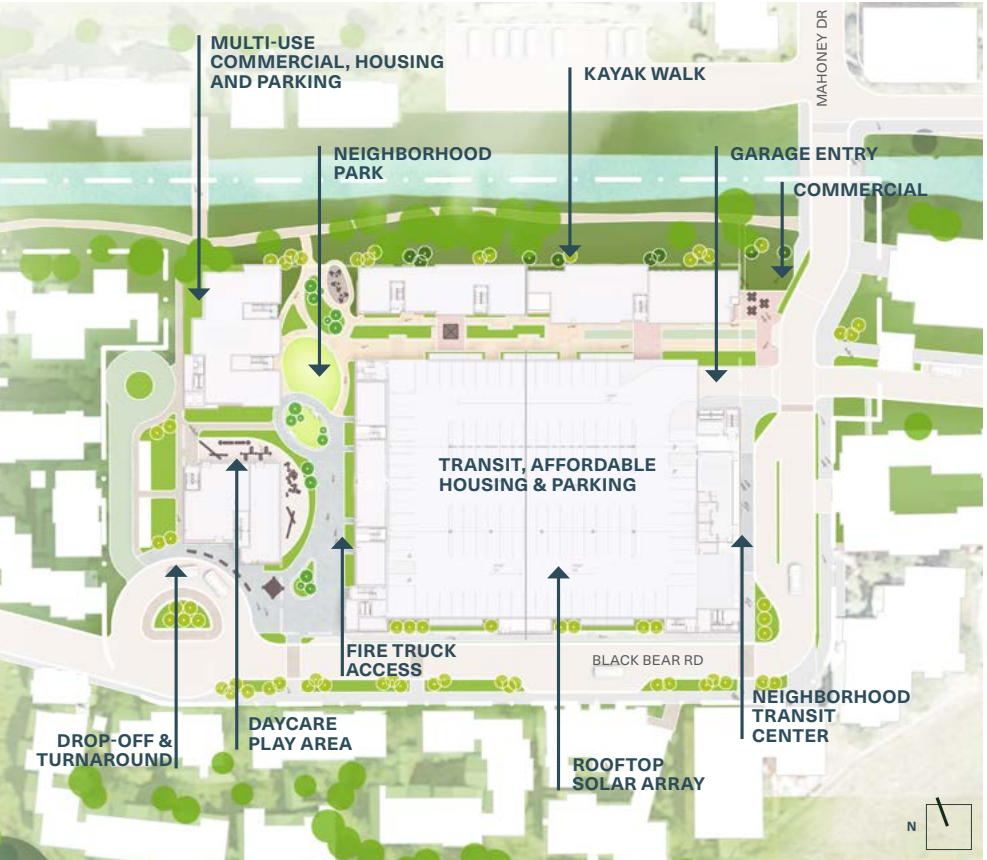


DEVELOPMENT SUMMARY:	
HOUSING	+/- 57,600 SF (Limited number of units can be free market)
MULTI-USE	+/- 6,000 SF (Fitness, Childcare, Food Bank, Small F&B)
TRANSIT	+/- 2,700 SF (Transit Center, Bike/Passenger Storage Area)
PARKING	+/- 900 Spaces

PROGRAM COMPARISON

	Feasibility Study Plan	Alternative 1	Alternative 2	Alternative 2B
Core Program				
Parking Spaces Existing Lot L spaces (320 +/-) Relocated spaces from Carhenge (288+/-) New, commuter spaces (292 +/-)	960	900	900	900
Transit Oriented Commercial Use (Public restrooms)	3,280 SF	3,740 SF	2,455 SF	2,730 SF
Mix of Affordable Residential Units	35,500 SF	24,163 SF	61,922 SF*	57,600 SF*
Studios / One Bedrooms Two Bedrooms Three Bedrooms	29 units	30 units	50-60 units*	50- 60 units*
Bike Parking	1,190 SF	1,202 SF	1,440 SF	1,500 SF
Neighborhood-serving Use / Multi-use (Childcare facility, Food Bank, and fitness amenities)	n/a	4,000 SF	5,150 SF	6,000 SF
Neighborhood Park (Improved access to river and trail)	Approx. 23,000 SF	Approx.20,000 SF	(2 Park Areas) Park 1 - 15,000SF Park 2 - Approx. 15,000 SF	Park Areas 25,000 SF Pedestrian Alley 10,000 SF

* Limited number of units can be free market

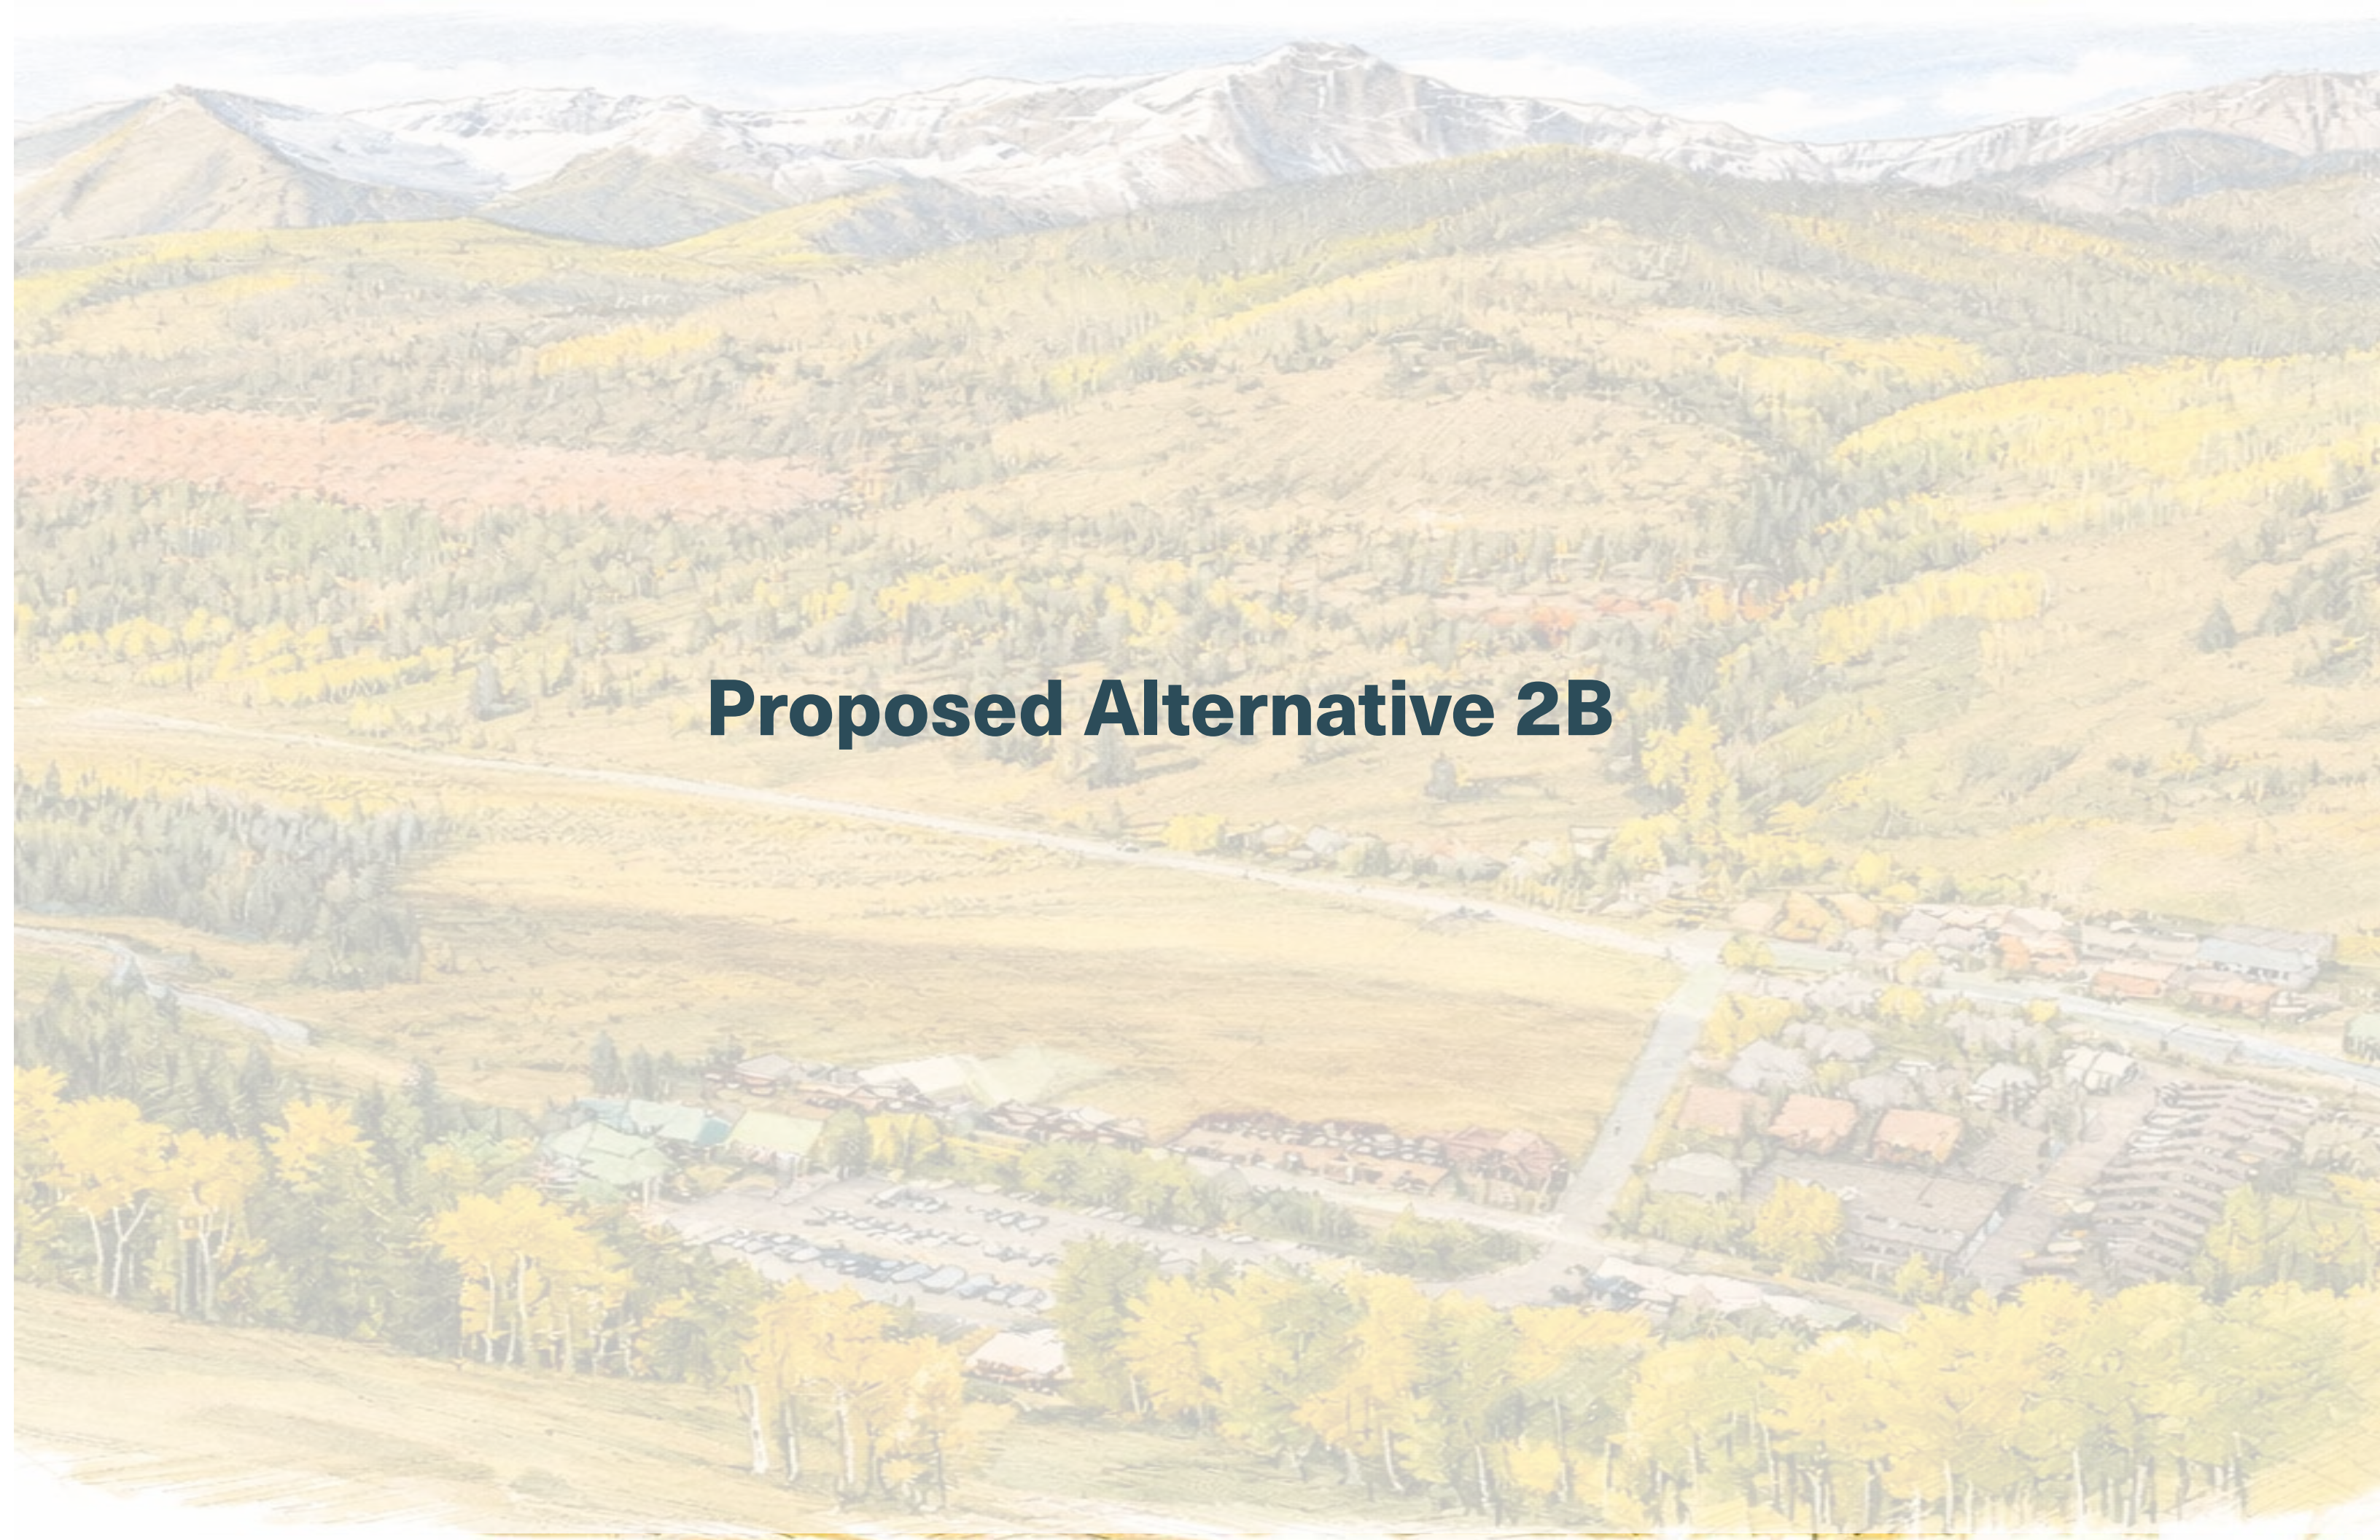An aerial photograph of a mountainous landscape. In the background, there are large, rugged mountains with patches of snow. The middle ground shows rolling hills covered in dense forests with trees displaying vibrant autumn colors in shades of yellow, orange, and red. A wide, light-colored road or path runs horizontally across the middle of the image. In the foreground, there is a developed area featuring a large parking lot with several cars, a building with a green roof, and other smaller structures. The overall scene is a mix of natural beauty and human development.

Proposed Alternative 2B

SITE PLAN (Exhibit D)

A partially multi-level partially buried parking structure wrapped with affordable housing and a limited number of free-market units is central to the Lot L site. A transit center is located along Mahoney Drive, community commercial establishments, such as childcare, fitness, food bank, and restaurant/retail activate the pedestrian realm, which circumnavigates the garage structure and provides connectivity across the site.

LEGEND

- A** PEDESTRIAN RIVER CROSSING
- B** COMMUNITY PARK
- C** KAYAK RIVER CONNECTION
- D** DAYCARE PLAY AREA
- E** FIRE ACCESS LANE
- F** VEHICULAR ROUNDABOUT
- G** BIKE AND TRASH ENCLOSURES
- H** VEHICULAR PULL-OFF
- I** TRANSIT CENTER / BUS STOP
- J** PARKING GARAGE ENTRY
- K** OUTDOOR COMMERCIAL SEATING
- L** PEDESTRIAN CROSSING
- M** BIKE PARKING



SITE CHARACTER



Transit Center



Raised Planter



Commercial Space




Lush Planting & Site Furnishing



Commercial Space



Bike Structures

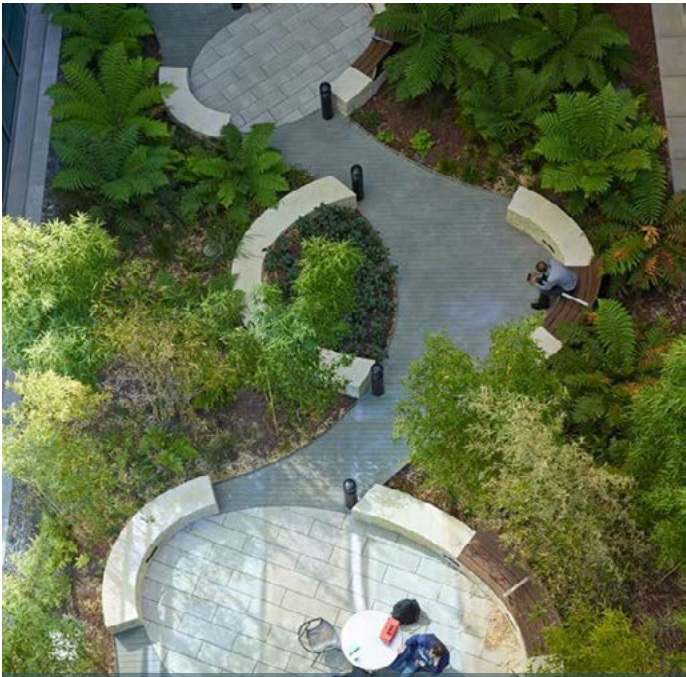


Neighborhood Parks

PEDESTRIAN CIRCULATION

The proposed concept prioritizes clear, connected pedestrian movement, with primary routes linking Mahoney Drive, the transit center and the San Miguel River Trail together. Primary pedestrian flows are reinforced along Mahoney with widened sidewalks expanded to 10 feet, enhanced streetscape plantings acting as buffers to soften the street edge and improved frontage conditions to create a safer and comfortable environment for pedestrians and bikers.


Crosswalks are strategically located strengthen the connectivity from Mahoney Drive and Black Bear Road into the site, improving visibility, safety, and accessibility between transit, housing, and open space areas. Pedestrian access to the ski area is maintained through existing Cimarron easements, allowing skiers to move efficiently between the sites.

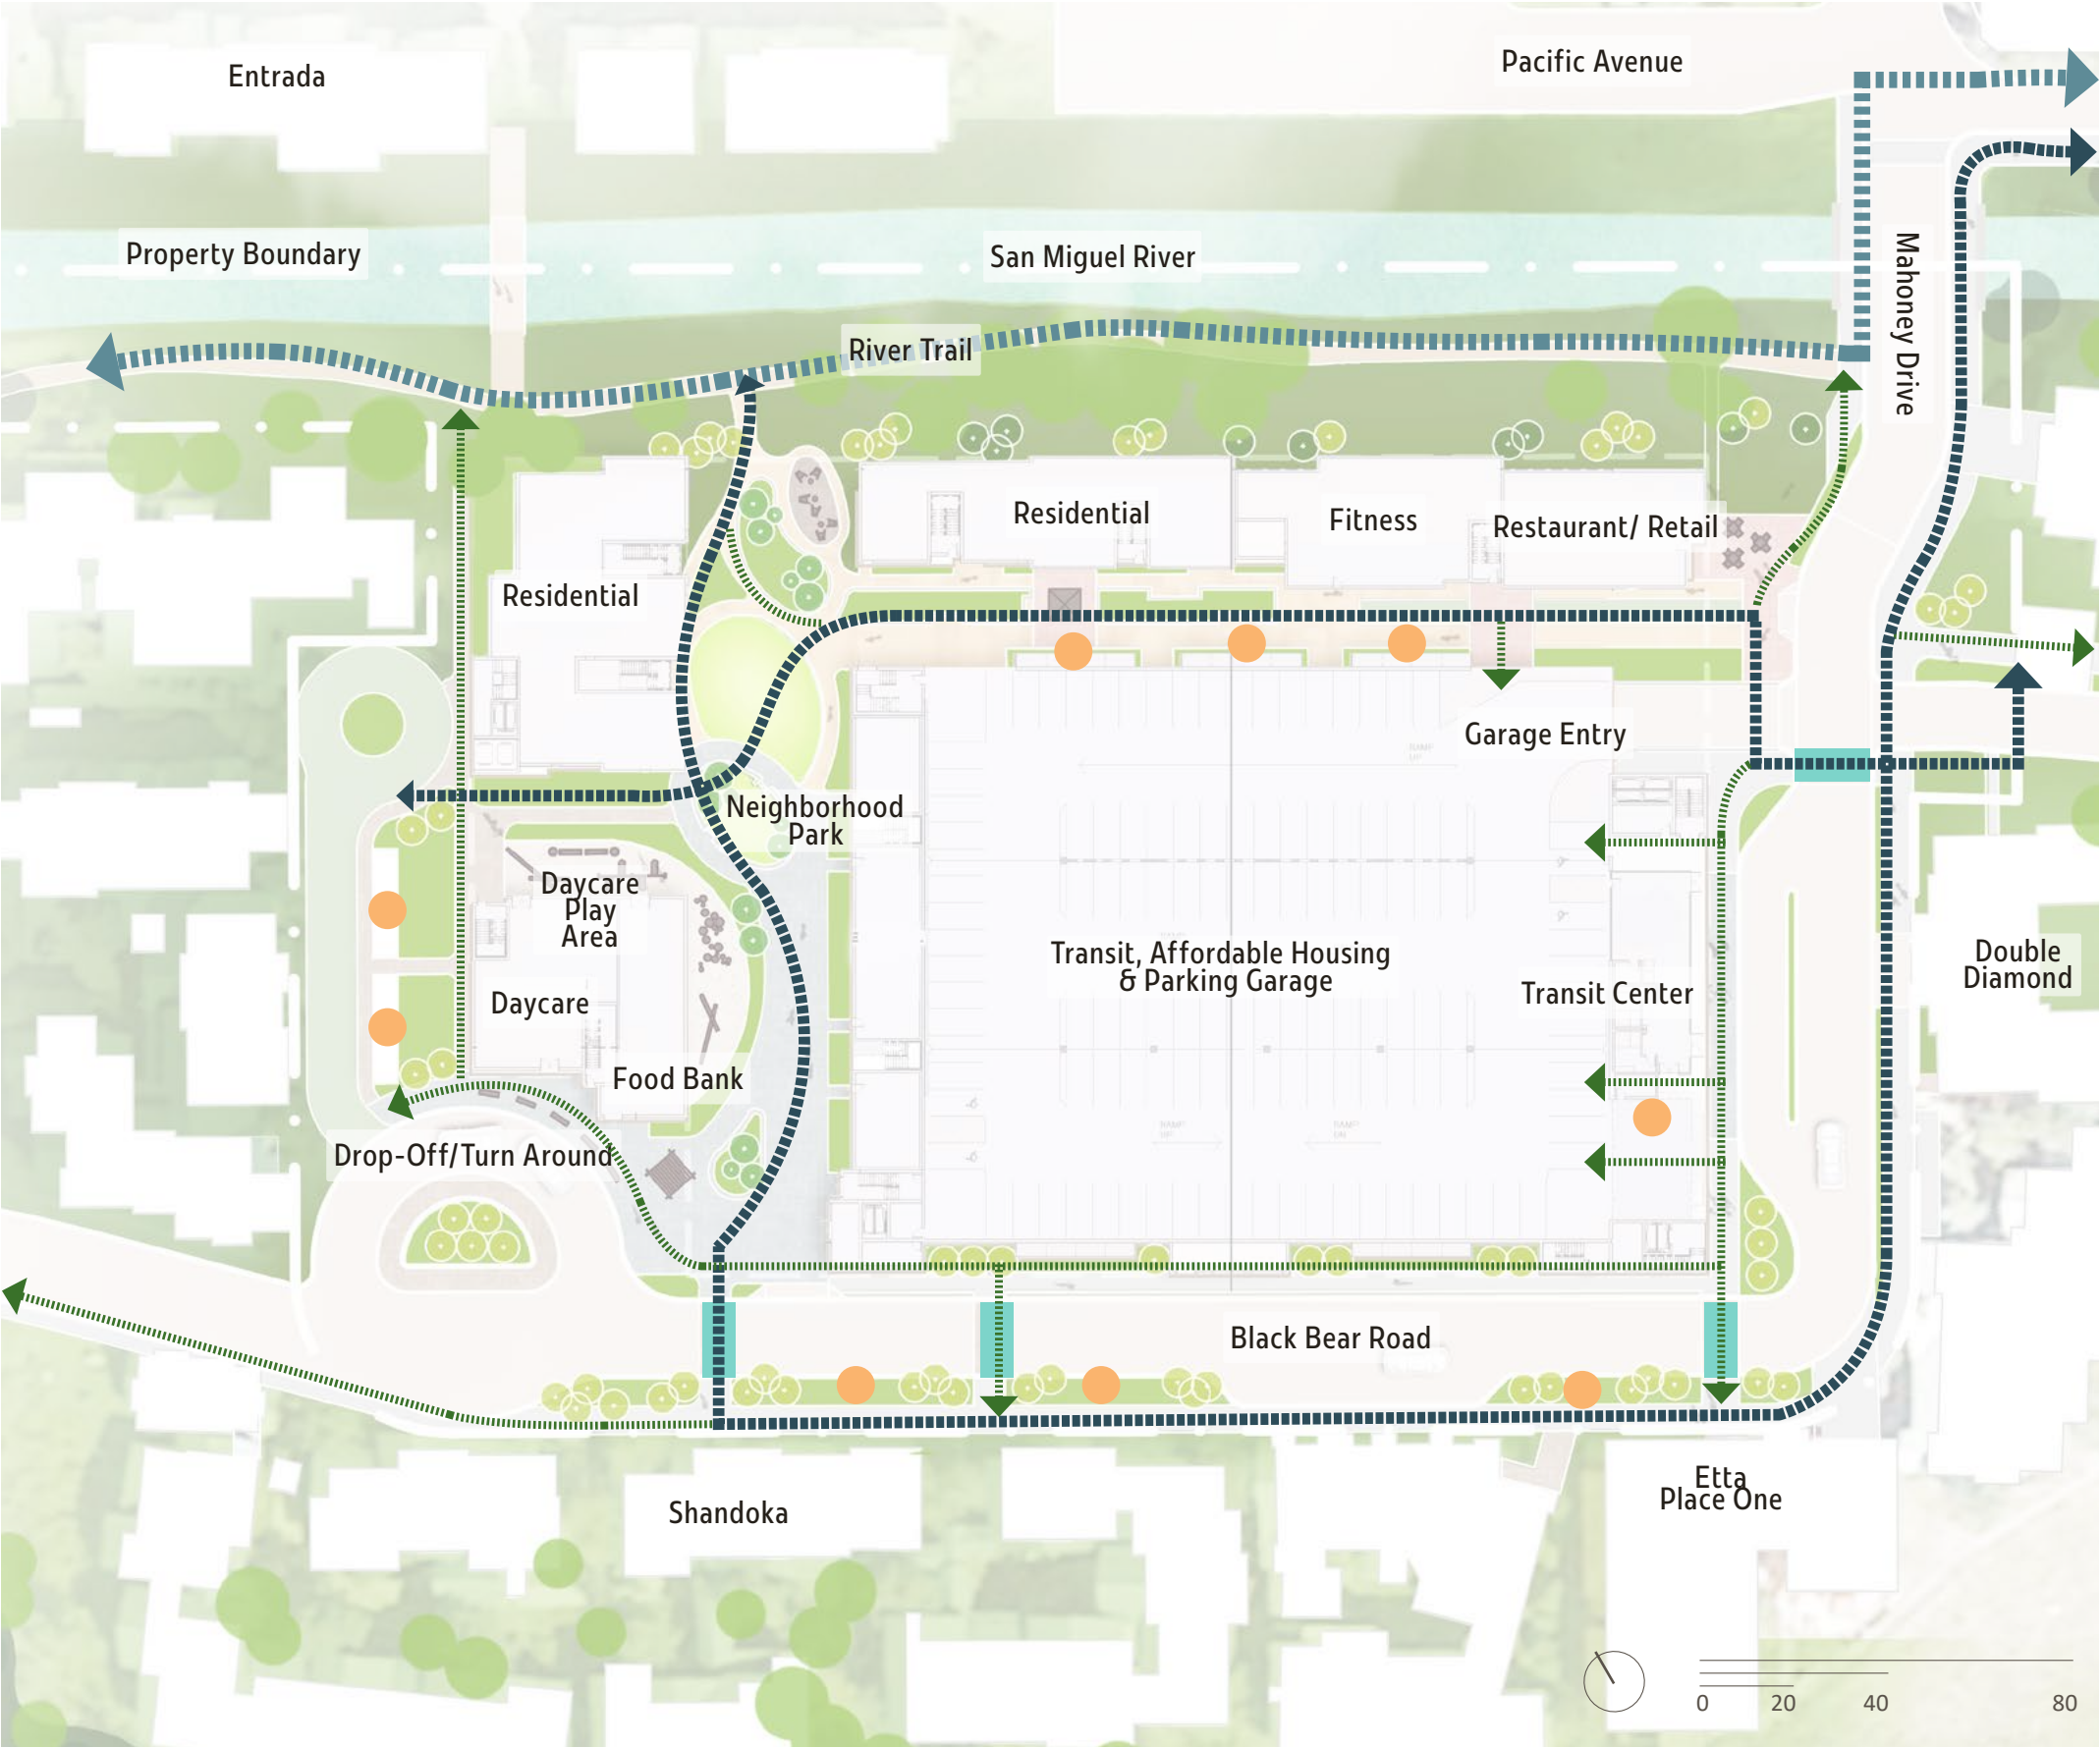

VEHICULAR CIRCULATION

Incoming vehicular traffic from Pacific Avenue is directed into the Shandoka parking garage to minimize vehicular and pedestrian conflicts and encounters. This approach supports a pedestrian-oriented streetscape along Mahoney Drive and Black Bear Road. Secondary vehicular circulation heading south to Black Bear is intentionally minimal only serving back-of-house operations, deliveries and local residential access.

The transit center has a dedicated bus pick-up and drop-off stop is integrated with the parking garage allowing buses to operate efficiently without disrupting vehicular flow. The Shandoka site ties into the Town's broader circulation network, with transit routes and stops incorporated along the street frontage.

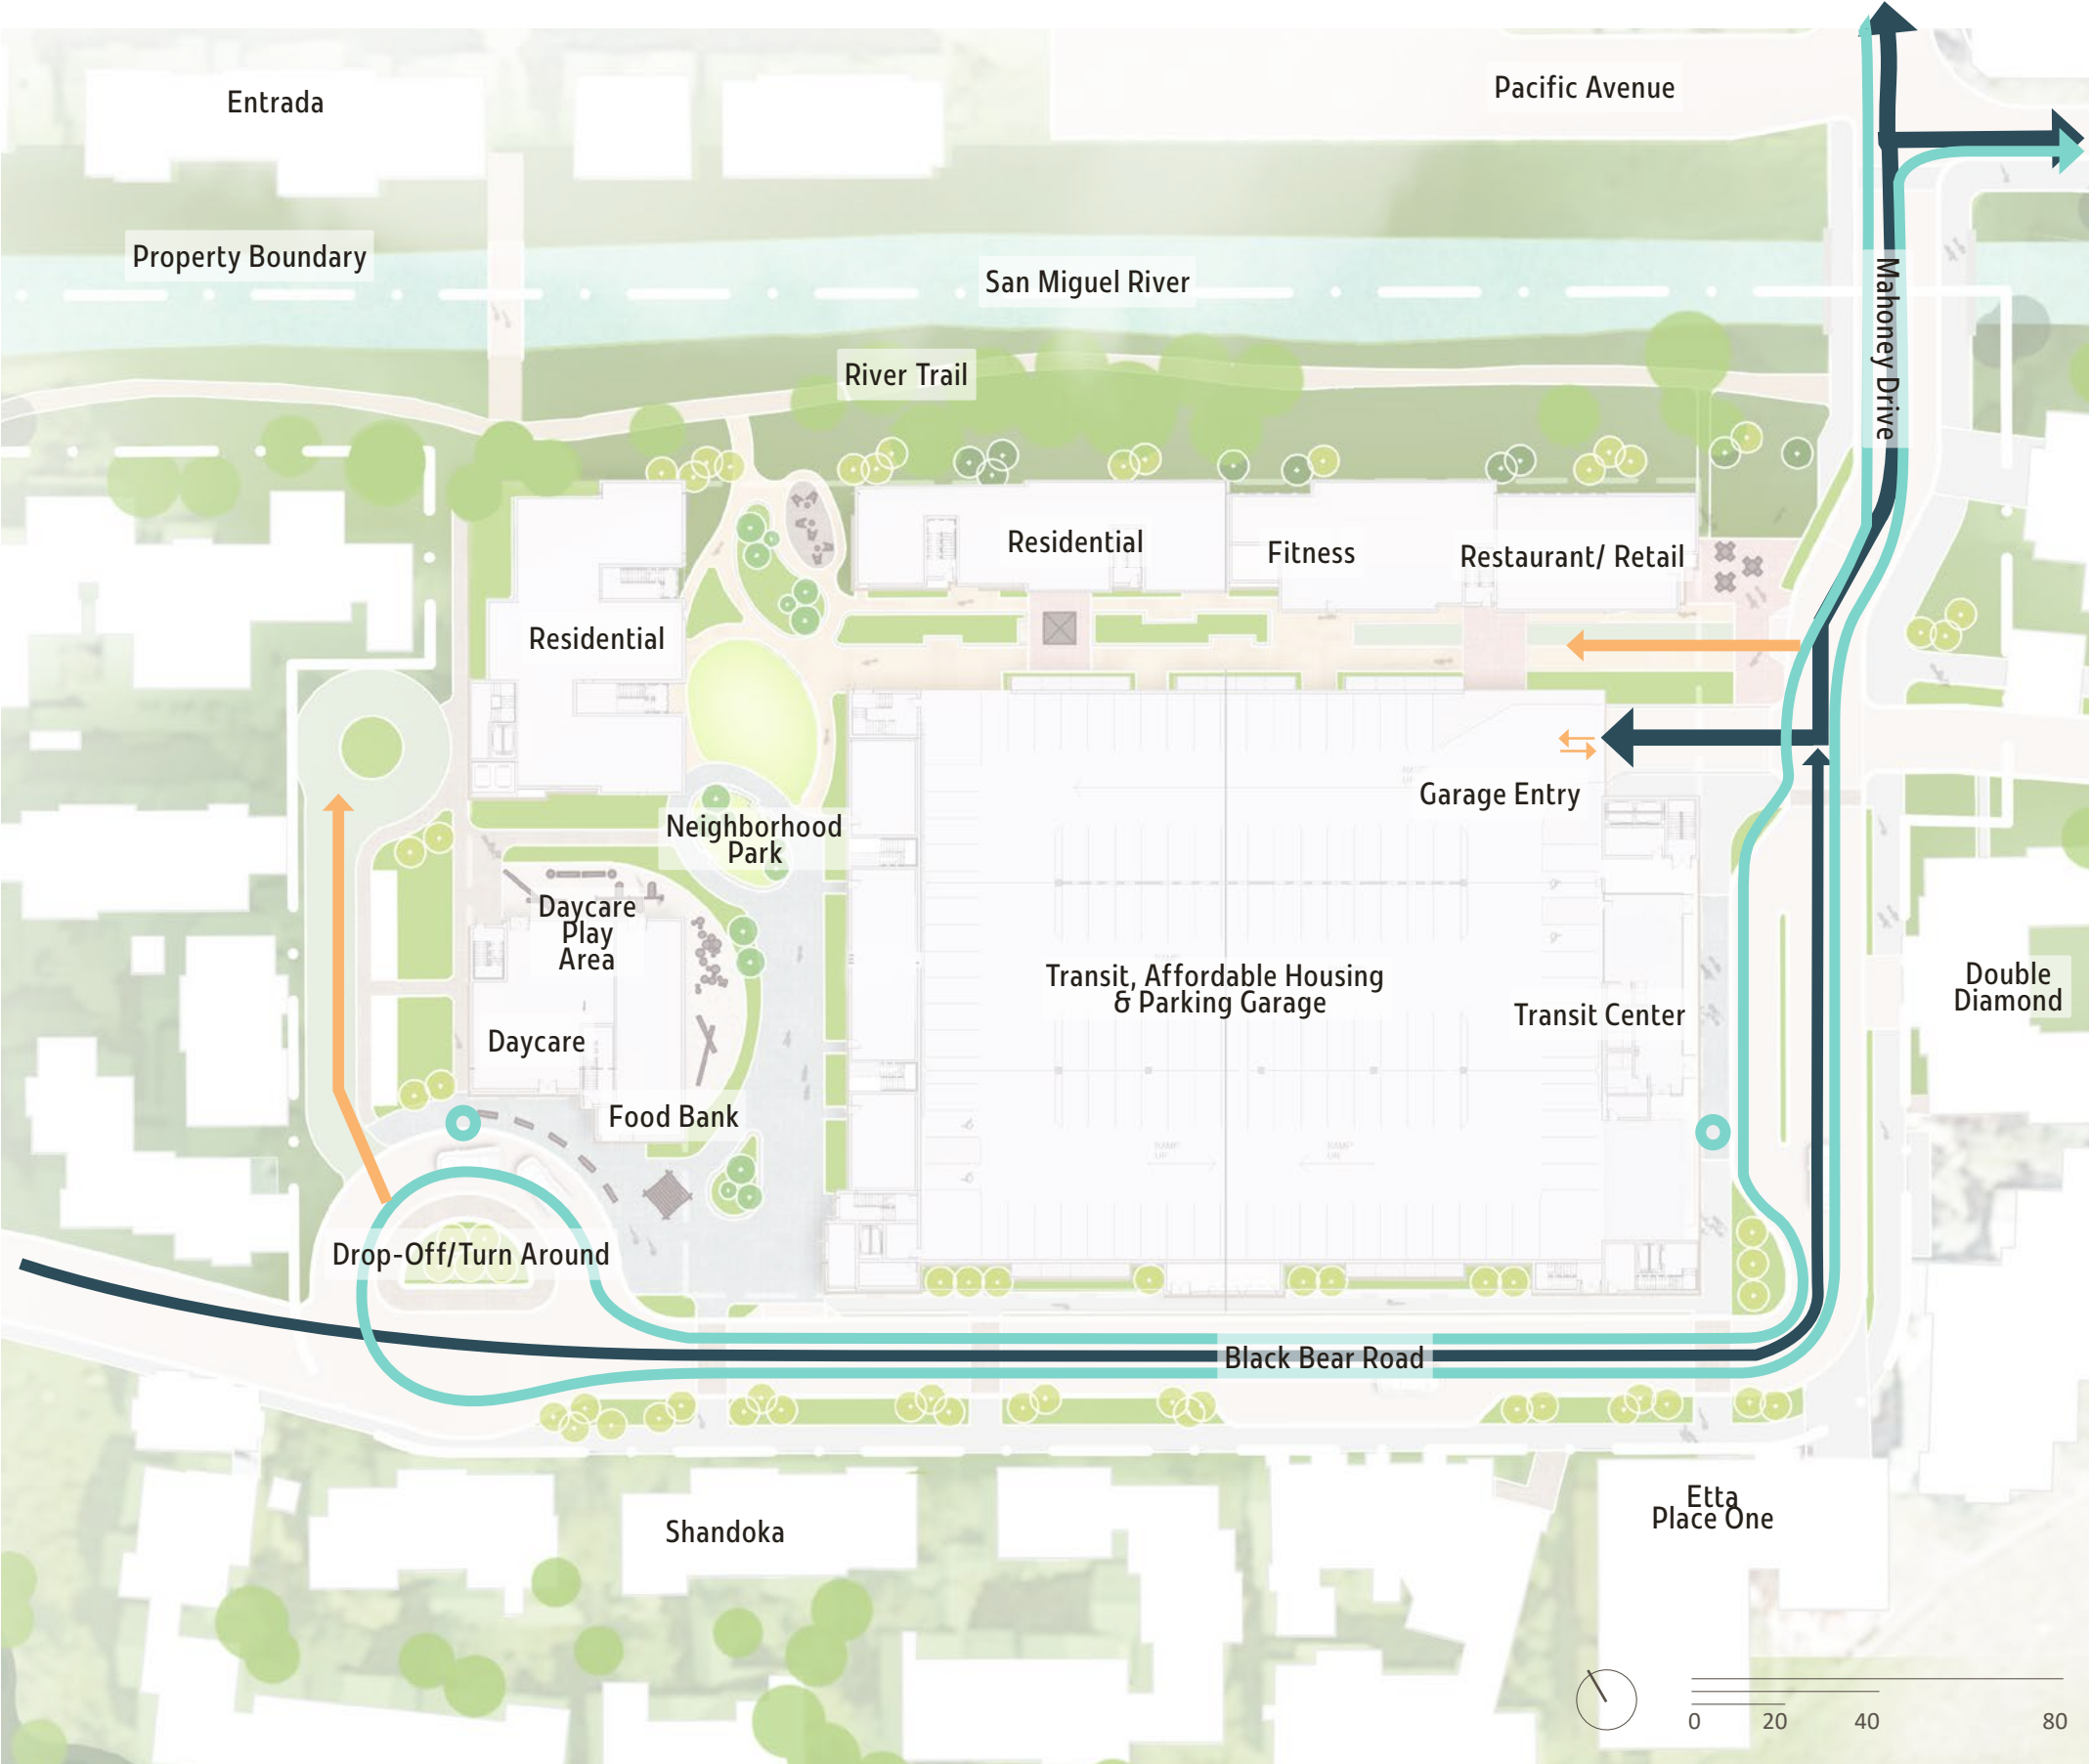

STREETSCAPE CHARACTER


These materials support the Southwest Area Plan’s emphasis on pedestrian priority, landscape buffering, and a human-scaled public realm. Enhanced paving and defined crossings improve walkability, while street trees and native plantings create separation from traffic and create a softer edge. Material selections emphasize a context-sensitive palette to reflect Telluride’s mountain character.



Human Scaled Streets



Enhanced Paving

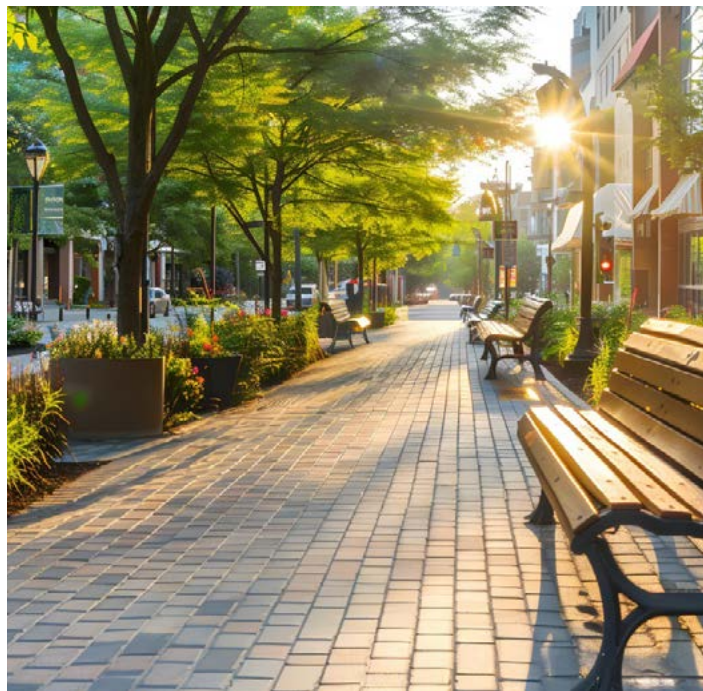

Crosswalks



Bike Shelters



Natural Streetscape Furnishings



Street Trees




Lush Native Plantings

An aerial photograph of a mountainous landscape. In the foreground, a small town is nestled in a valley, featuring a river, a parking lot, and several buildings. The middle ground is dominated by rolling hills covered in dense forests with vibrant autumn foliage in shades of yellow, orange, and red. In the background, majestic mountains with patches of snow rise against a clear sky. The text "Architectural Character" is overlaid in the center of the image.


Architectural Character

FLOOR PLANS


Ground Level

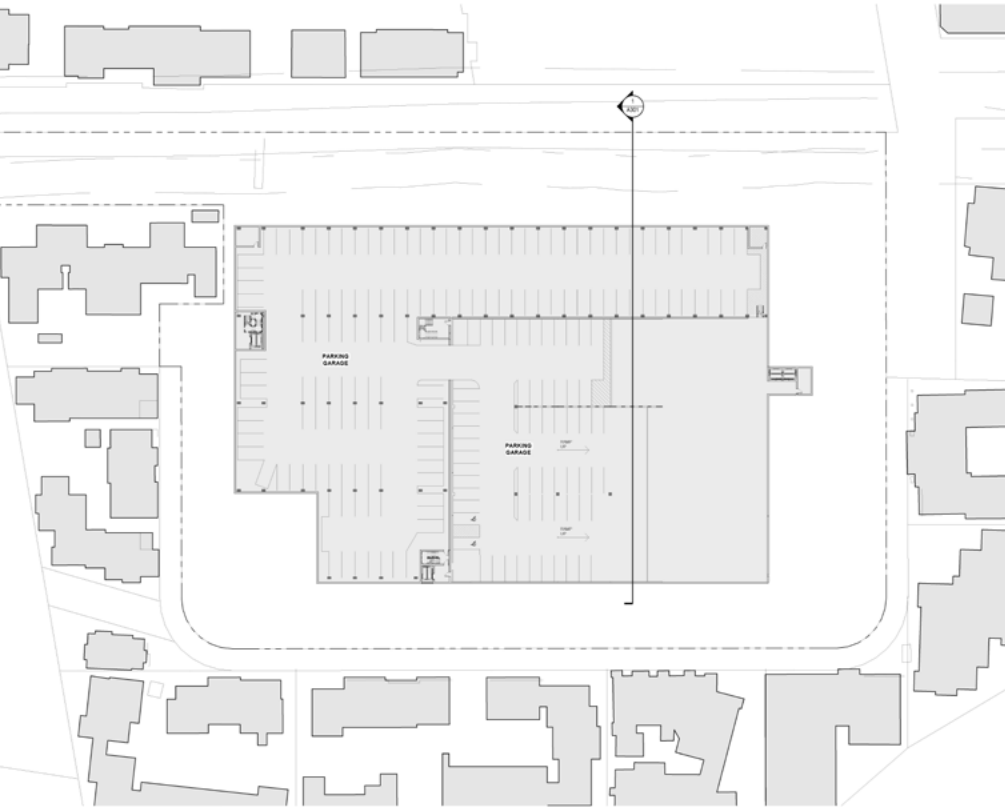

Lower Level

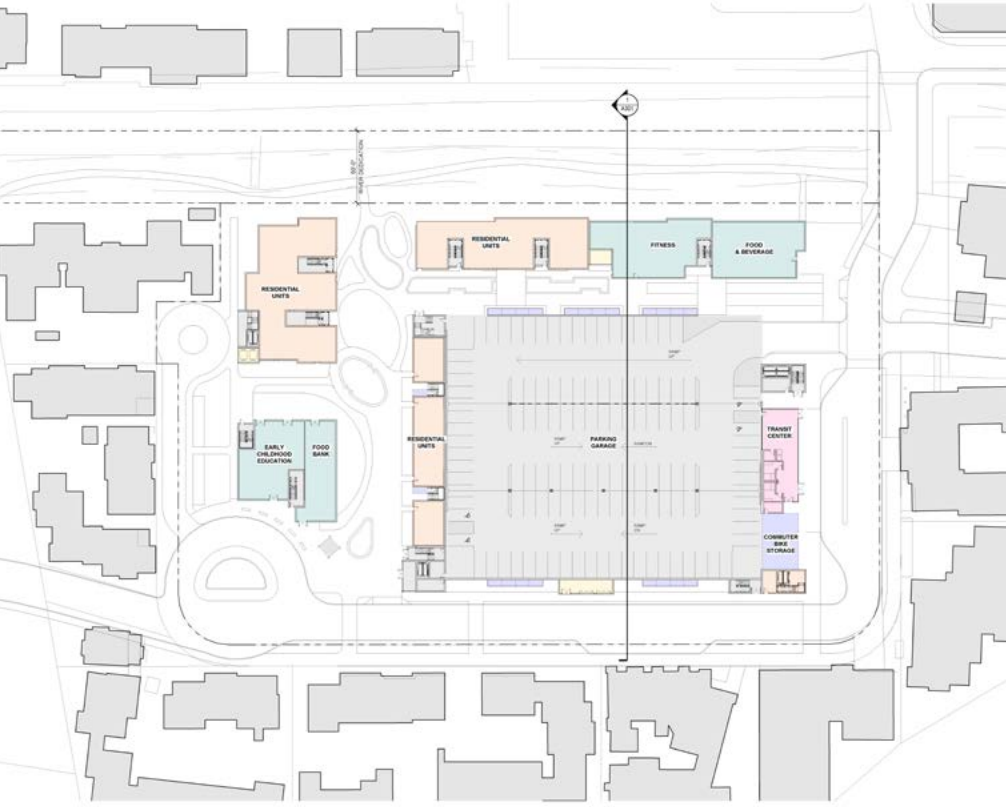

Upper Levels

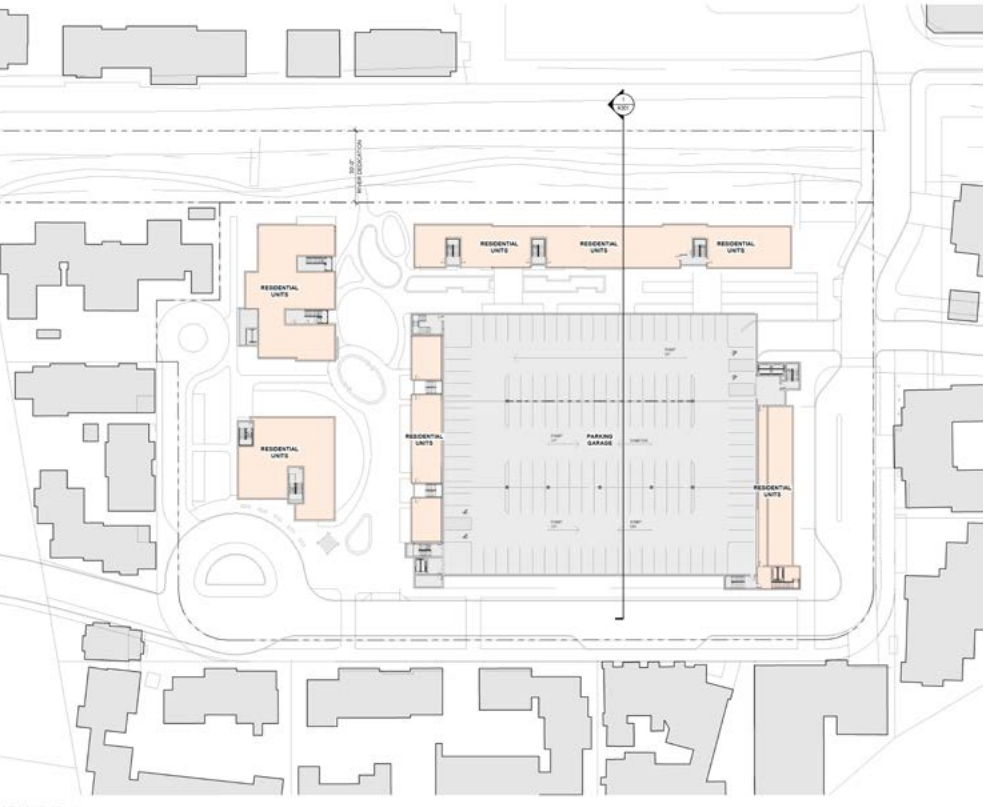

AREA PLAN LEGEND


PARKING GARAGE / VERTICAL CIRCULATION	TRANSIT CENTER	BIKE STORAGE
RESIDENTIAL UNITS (LIMITED NUMBER CAN BE FREE MARKET)	MULTI-USE	TRASH CENTER

SITE DESIGN MATRIX

PARKING GARAGE TOTAL: +900 SPACES	RESIDENTIAL UNITS +7-50 ADUS (LIMITED NUMBER CAN BE FREE MARKET)
---	--

SITE SECTION

North-South Section

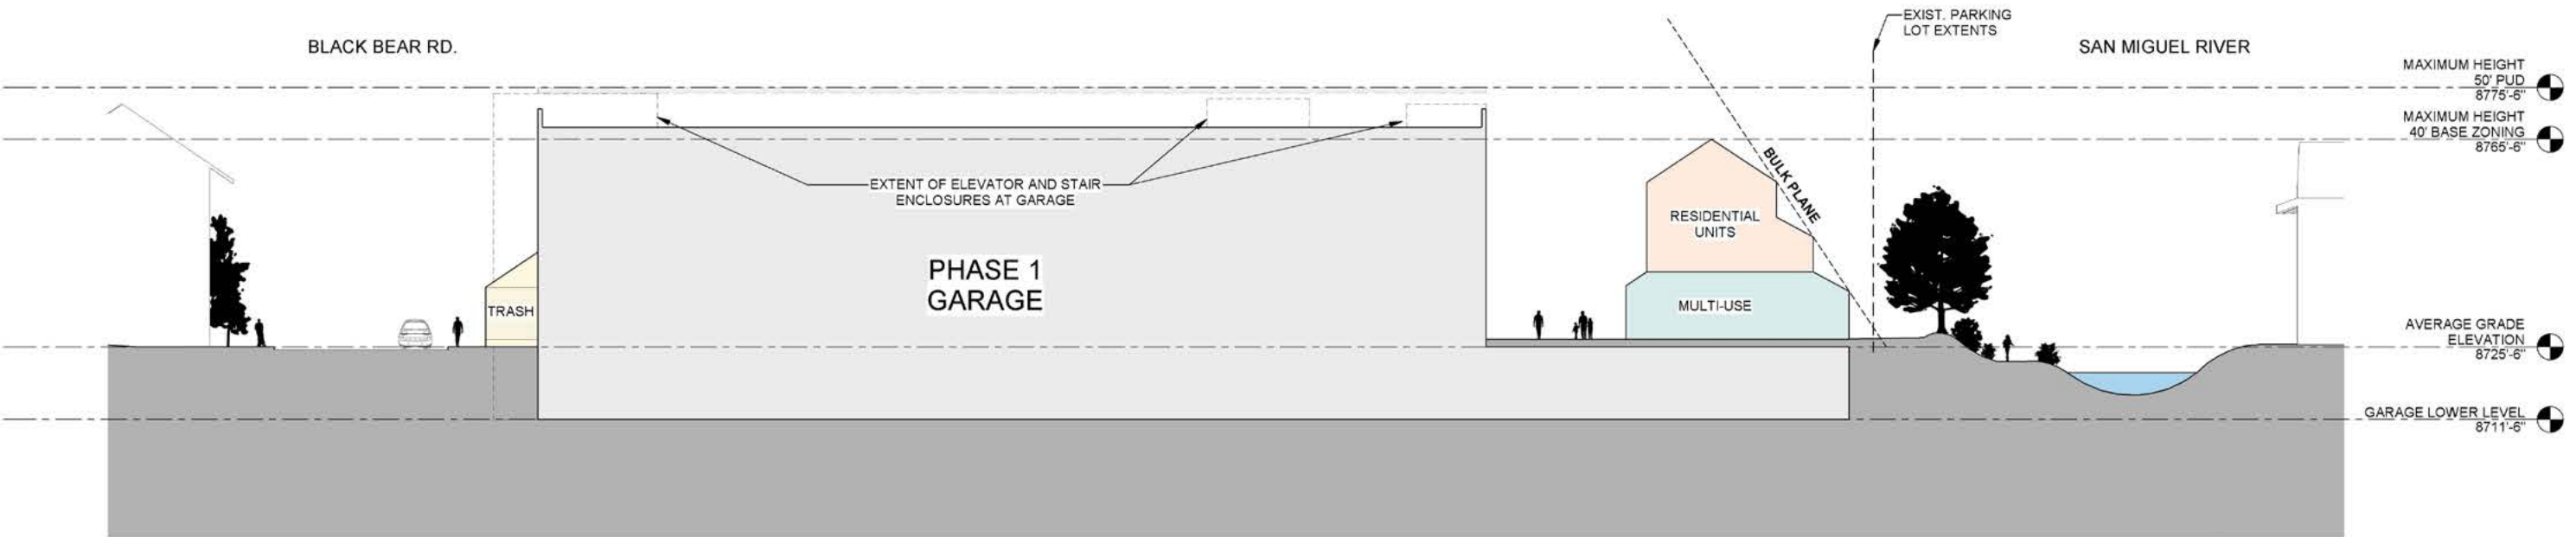

1 SITE SECTION - NORTH / SOUTH


A301

ARCHITECTURAL CHARACTER
View Looking South from Mahoney Bridge



ARCHITECTURAL CHARACTER

Birdseye View Looking South from Mahoney Bridge

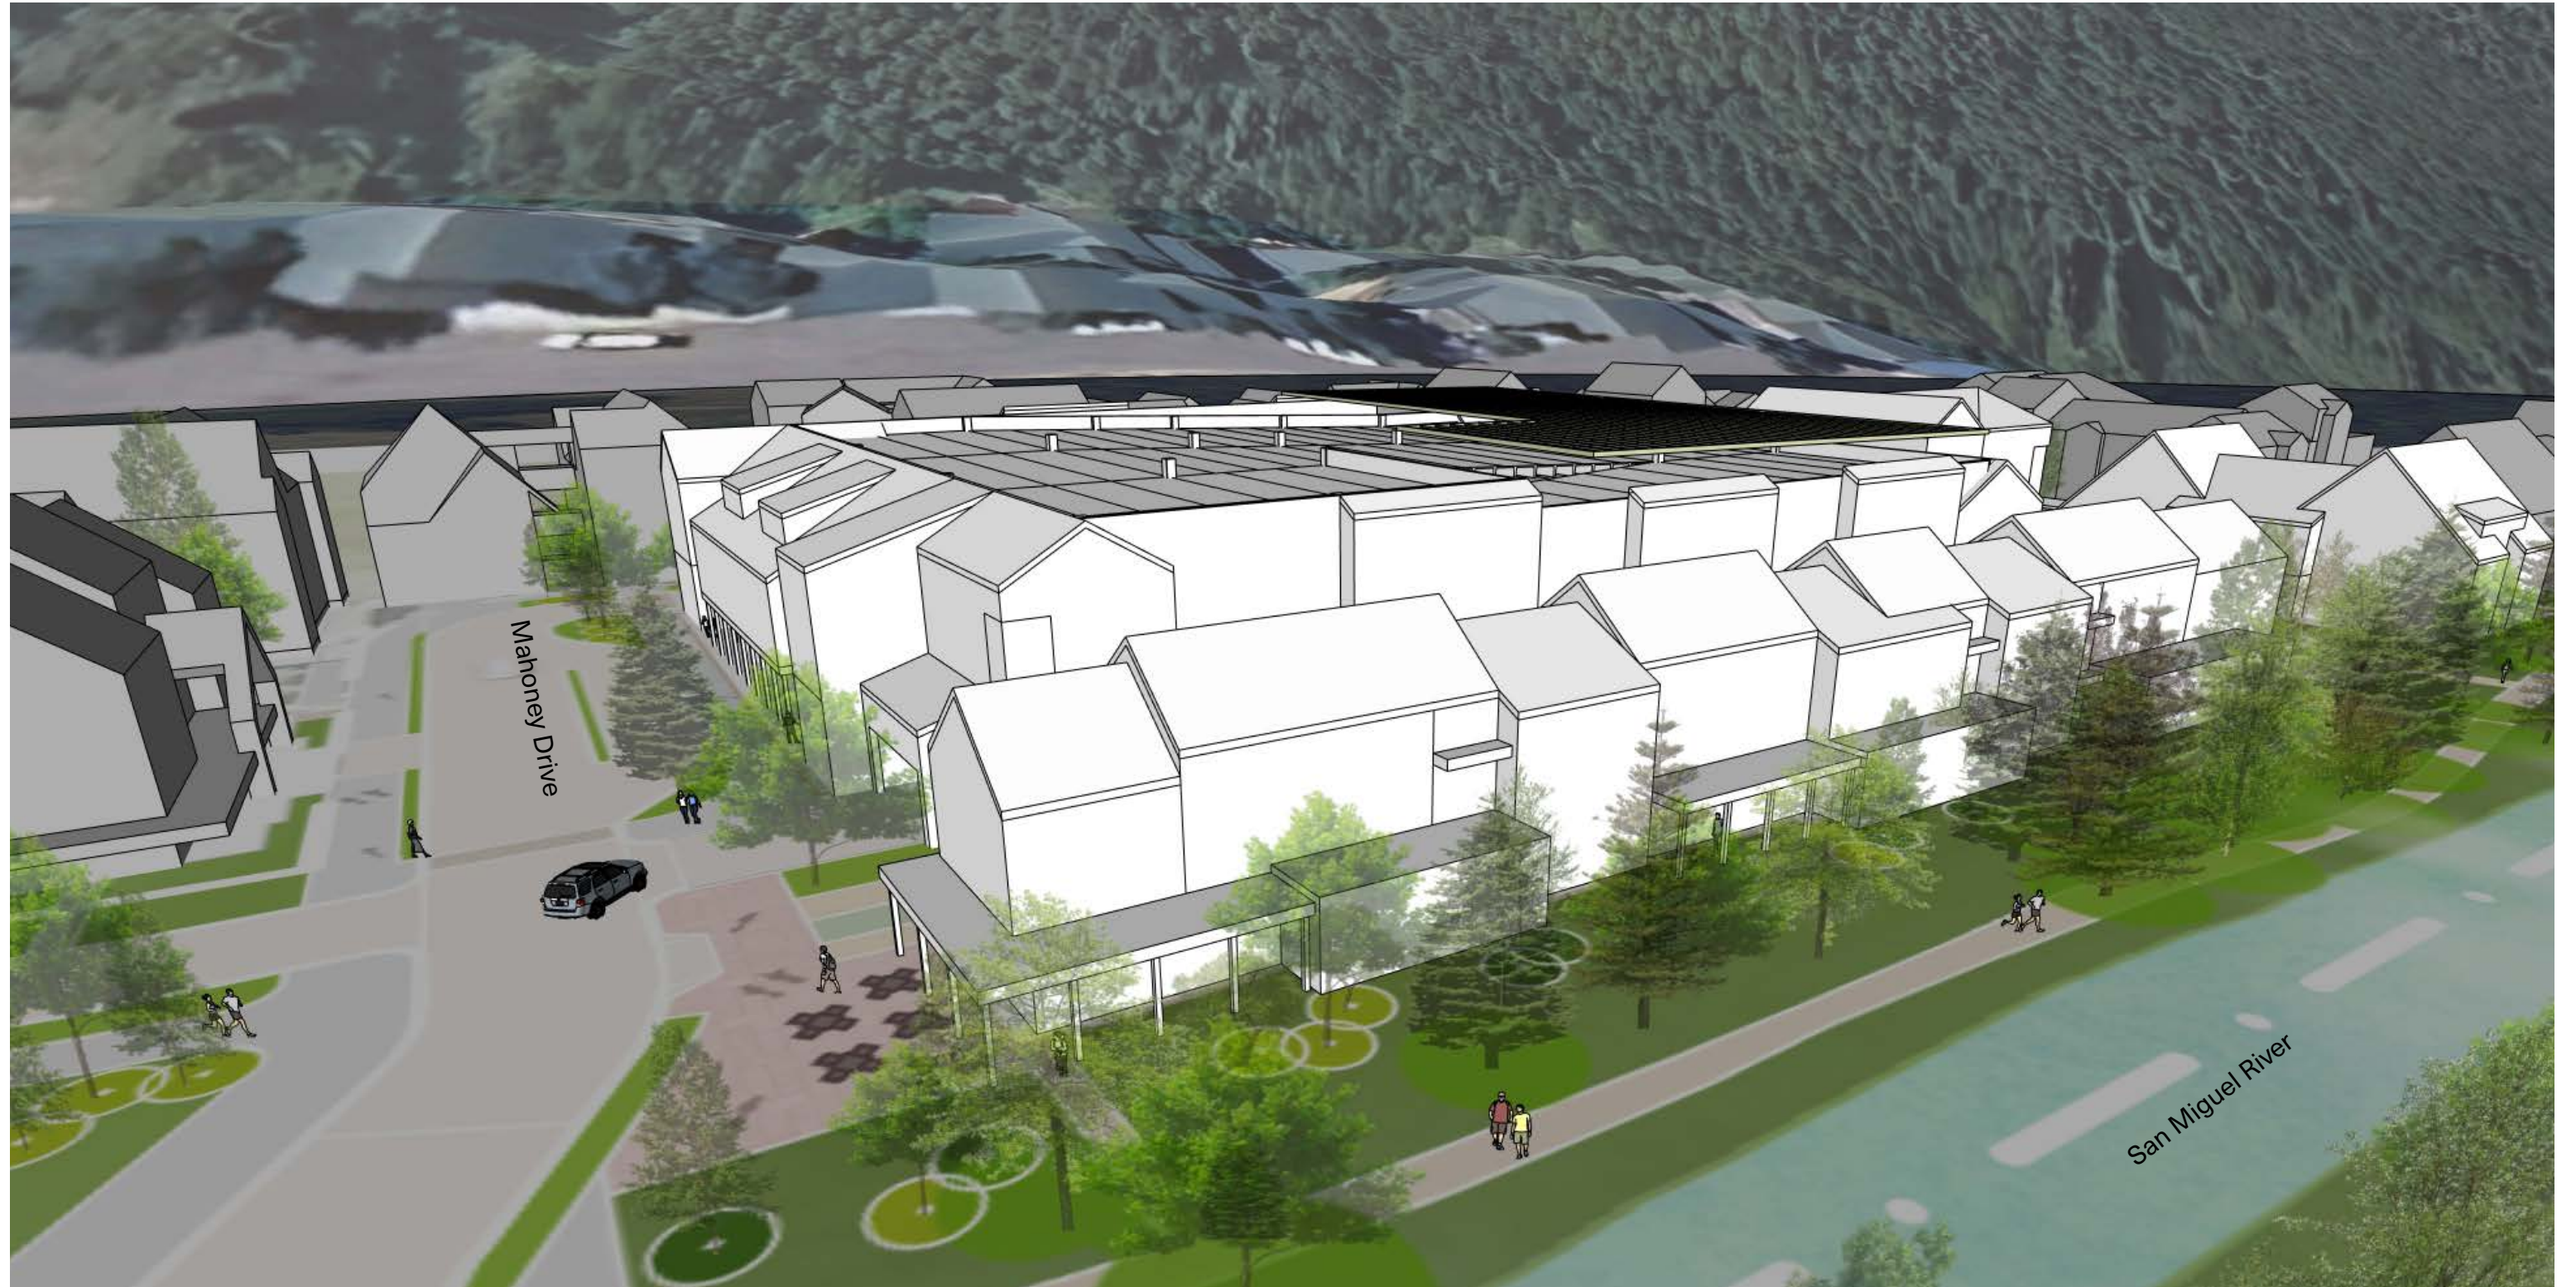

ARCHITECTURAL CHARACTER

View of Transit Center Looking West across Mahoney Drive



ARCHITECTURAL CHARACTER

Birdseye of Transit Center Looking Northwest from Etta Place



ARCHITECTURAL CHARACTER
View Looking Northeast from Black Bear Drive




ARCHITECTURAL CHARACTER

Birdseye View Looking Northeast from Black Bear Drive




CONSTRUCTION PHASING

Phase 1

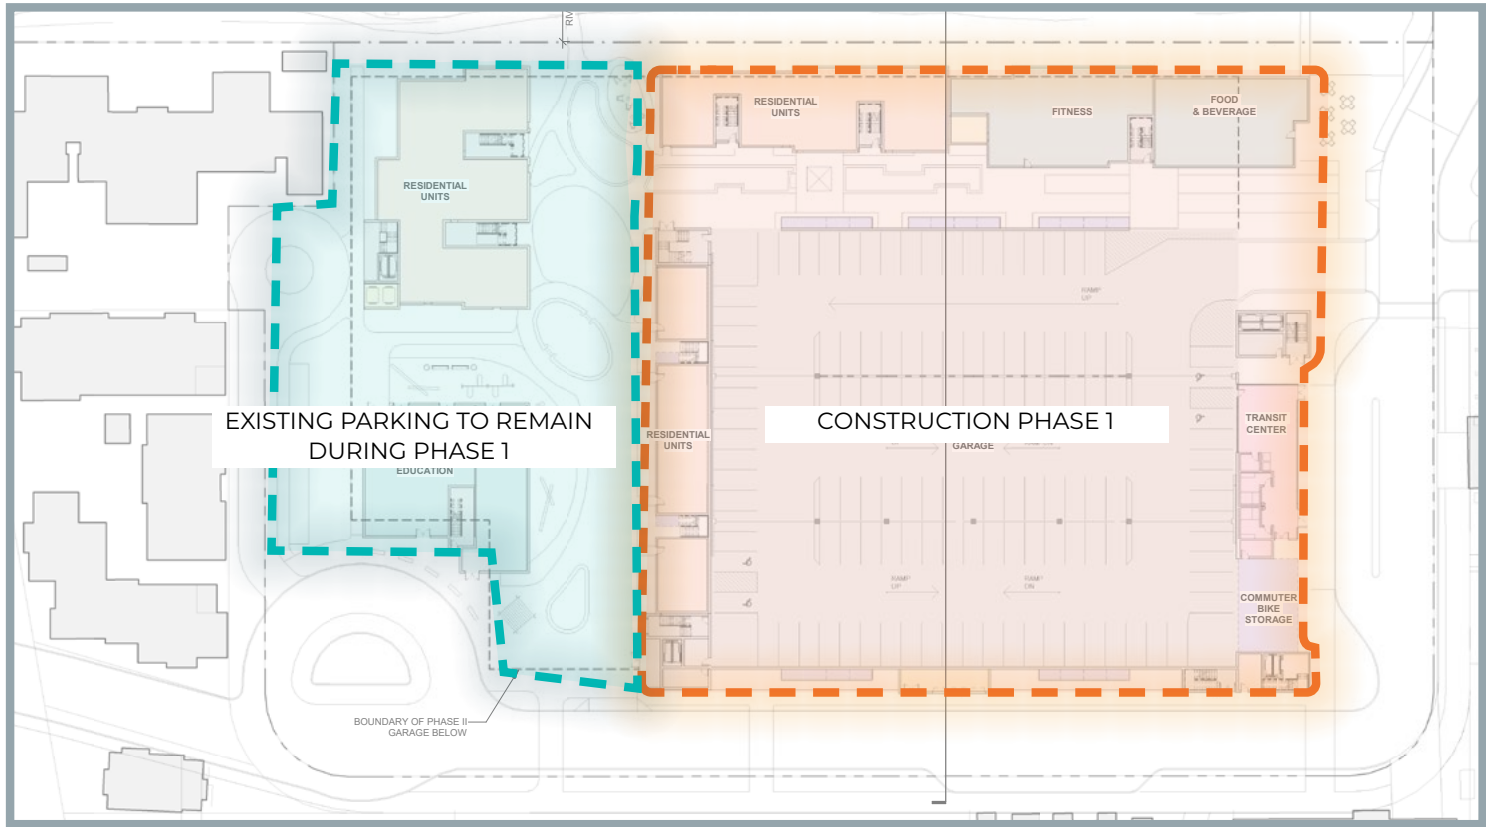

Phase 2

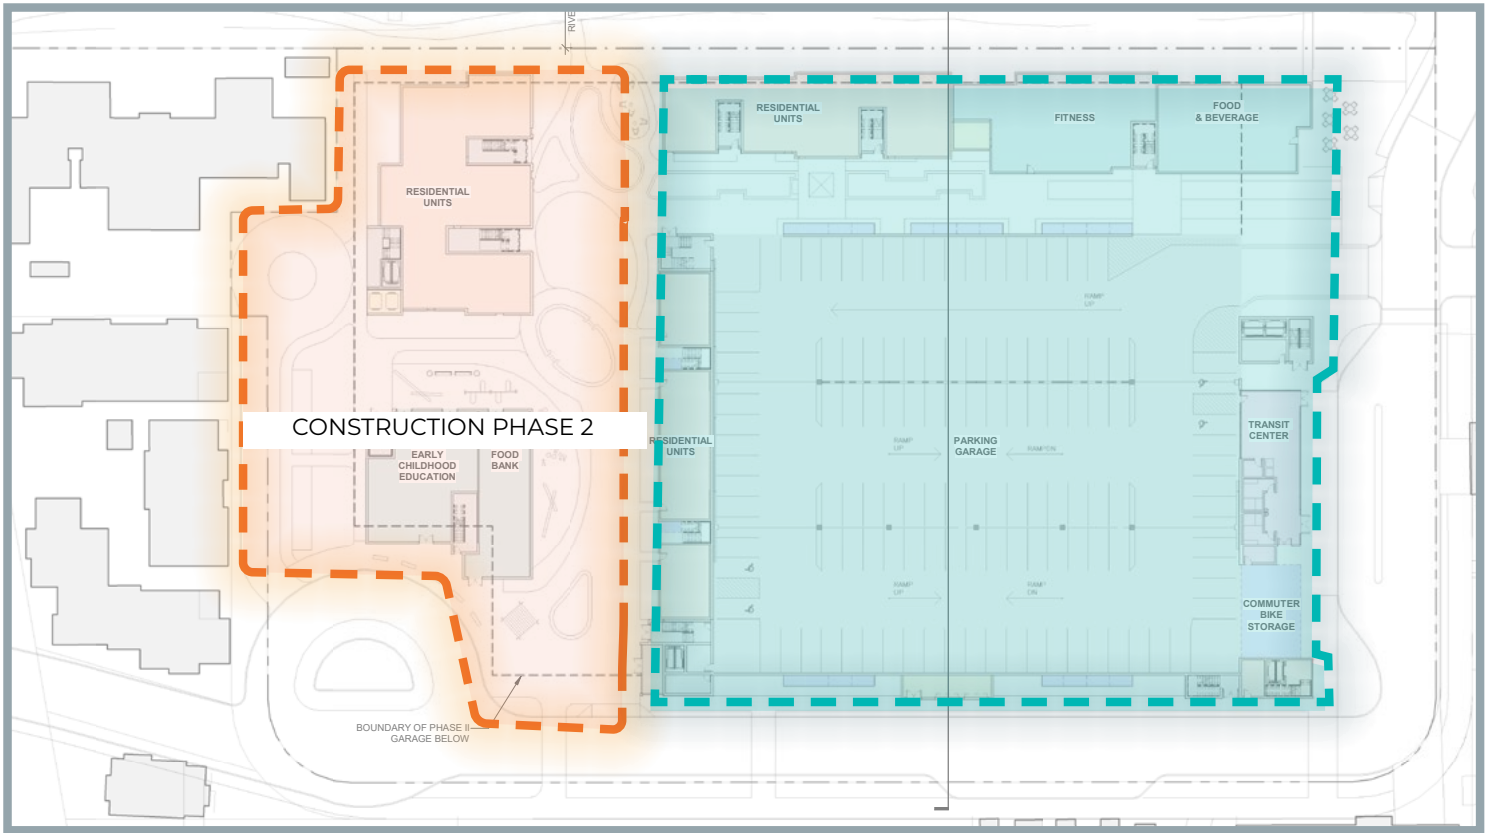

STREET SECTIONS


The proposed Mahoney Drive section aligns with the SWAP by prioritizing pedestrians through expanded sidewalks to 10 feet to support comfortable year-round use. Street trees and landscape buffers create separation from traffic to reinforce a safer and more walkable street.

A dedicated bus pull-off integrated with the transit center allows bus operations to function without disrupting Mahoney traffic. Together, these elements create a cohesive streetscape that enhances connectivity and reinforces a strong sense of place along Mahoney Drive.


MAHONEY DRIVE BEFORE



KEY PLAN

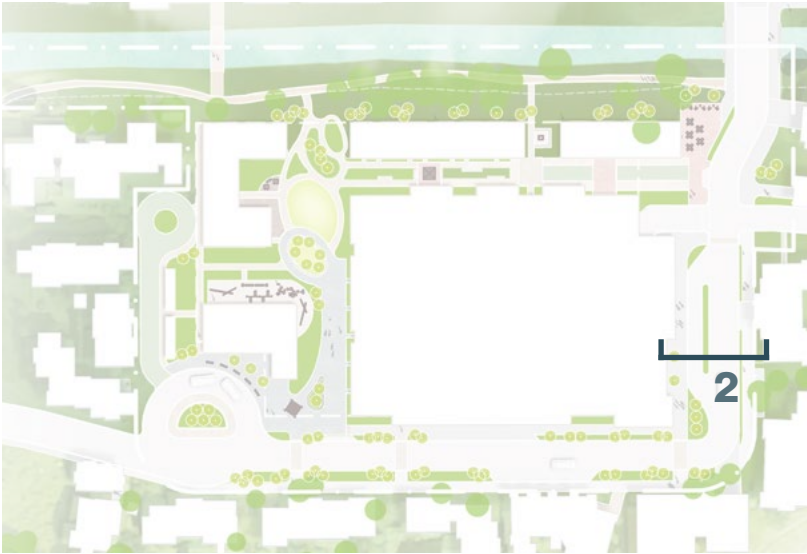

MAHONEY DRIVE AFTER

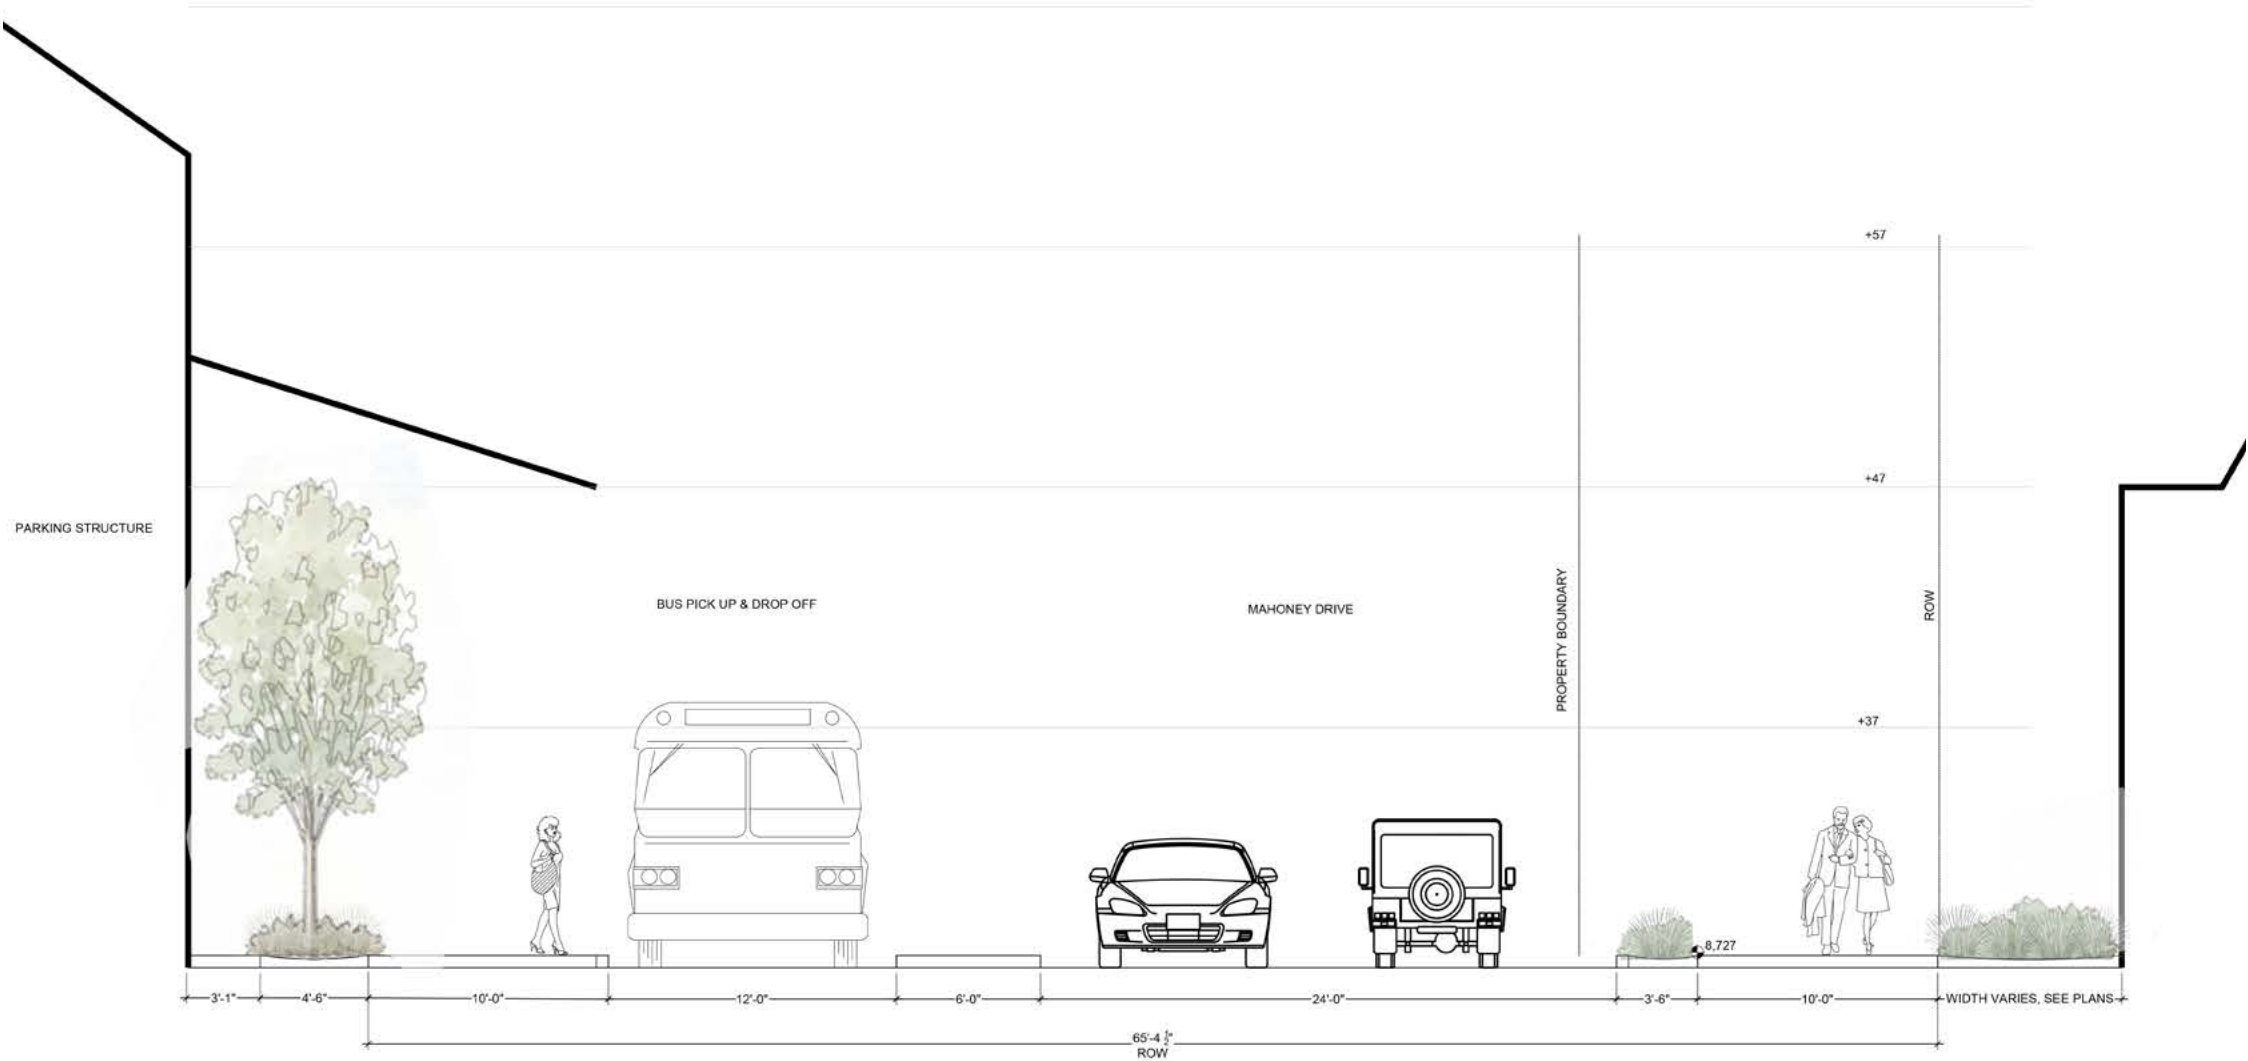

Building Heights?


STREET SECTIONS

The proposed Black Bear Road aligns with the SWAP vision for a pedestrian-oriented street that supports local access while minimizing the space given to vehicles. Narrower travel lanes and a simplified circulation pattern prioritize slower speeds and a more comfortable pedestrian environment. Expanded sidewalks and planting areas create a buffer between pedestrians and vehicles, while also providing space for street trees and landscaping. The inclusion of a pull-off supports delivery needs without compromising the pedestrian experience.

BLACK BEAR BEFORE



KEY PLAN

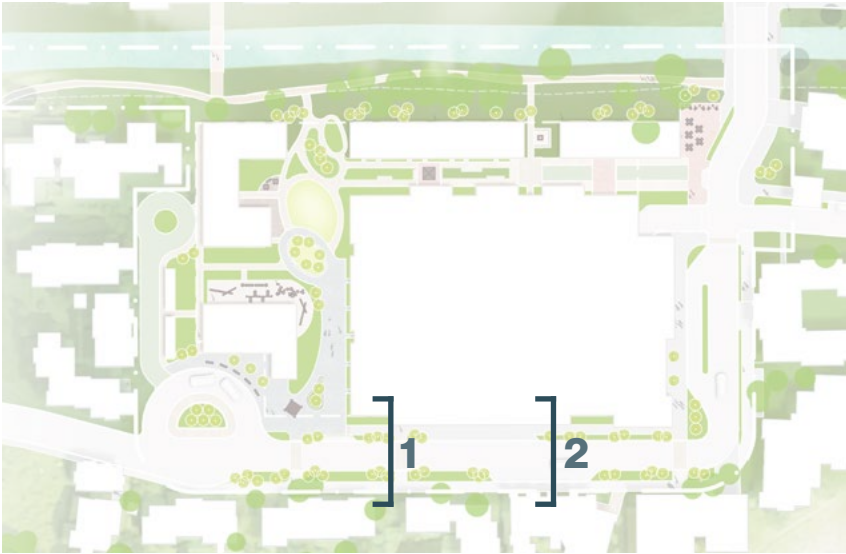


WANT TO IN-
CLUDE AT PUD -
COORD with CT

BLACK BEAR SECTION 1 - AFTER



SECTION 2 - AFTER

Building Heights?

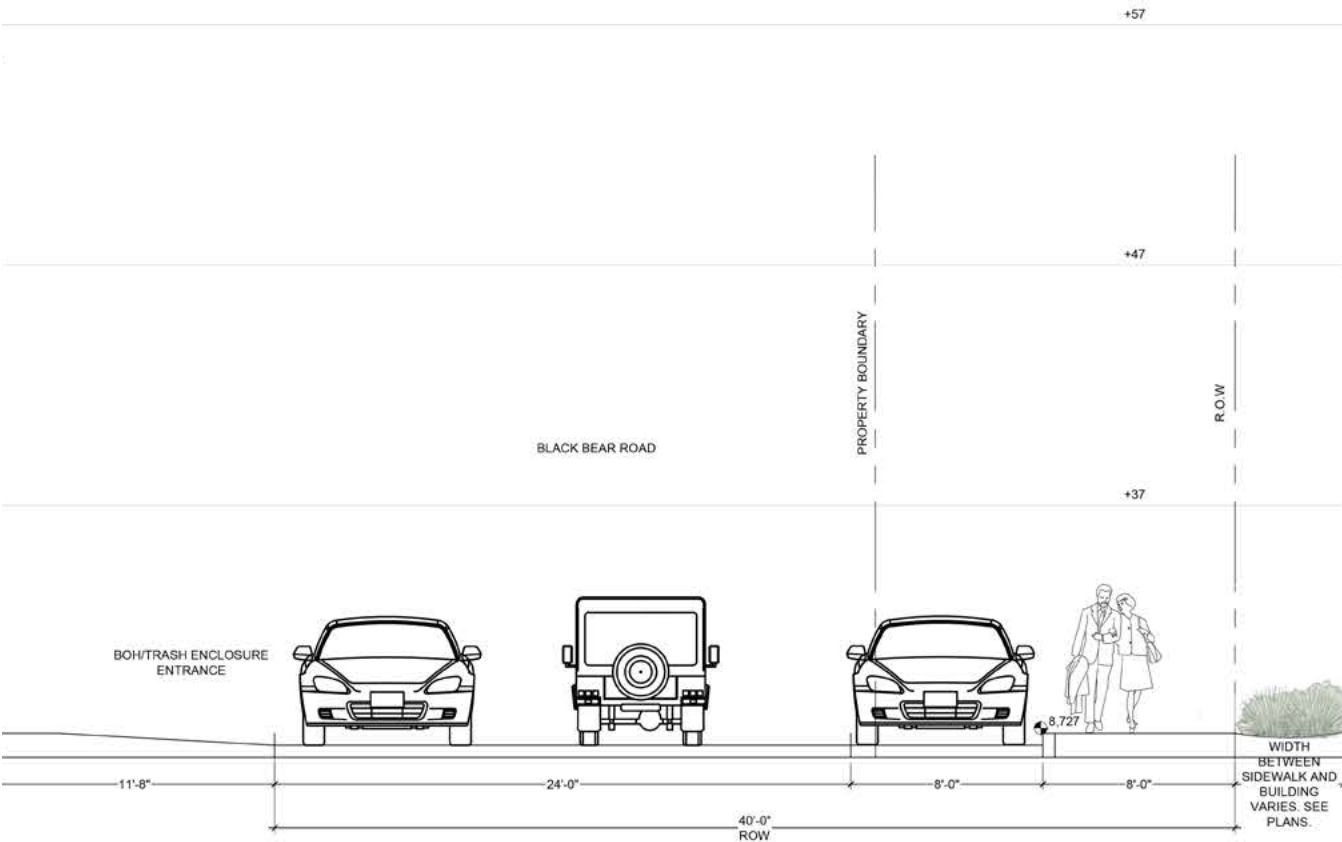


Building Heights?

ALLEYWAY SECTIONS


KEY PLAN



RESIDENTIAL ALLEY SECTION 1

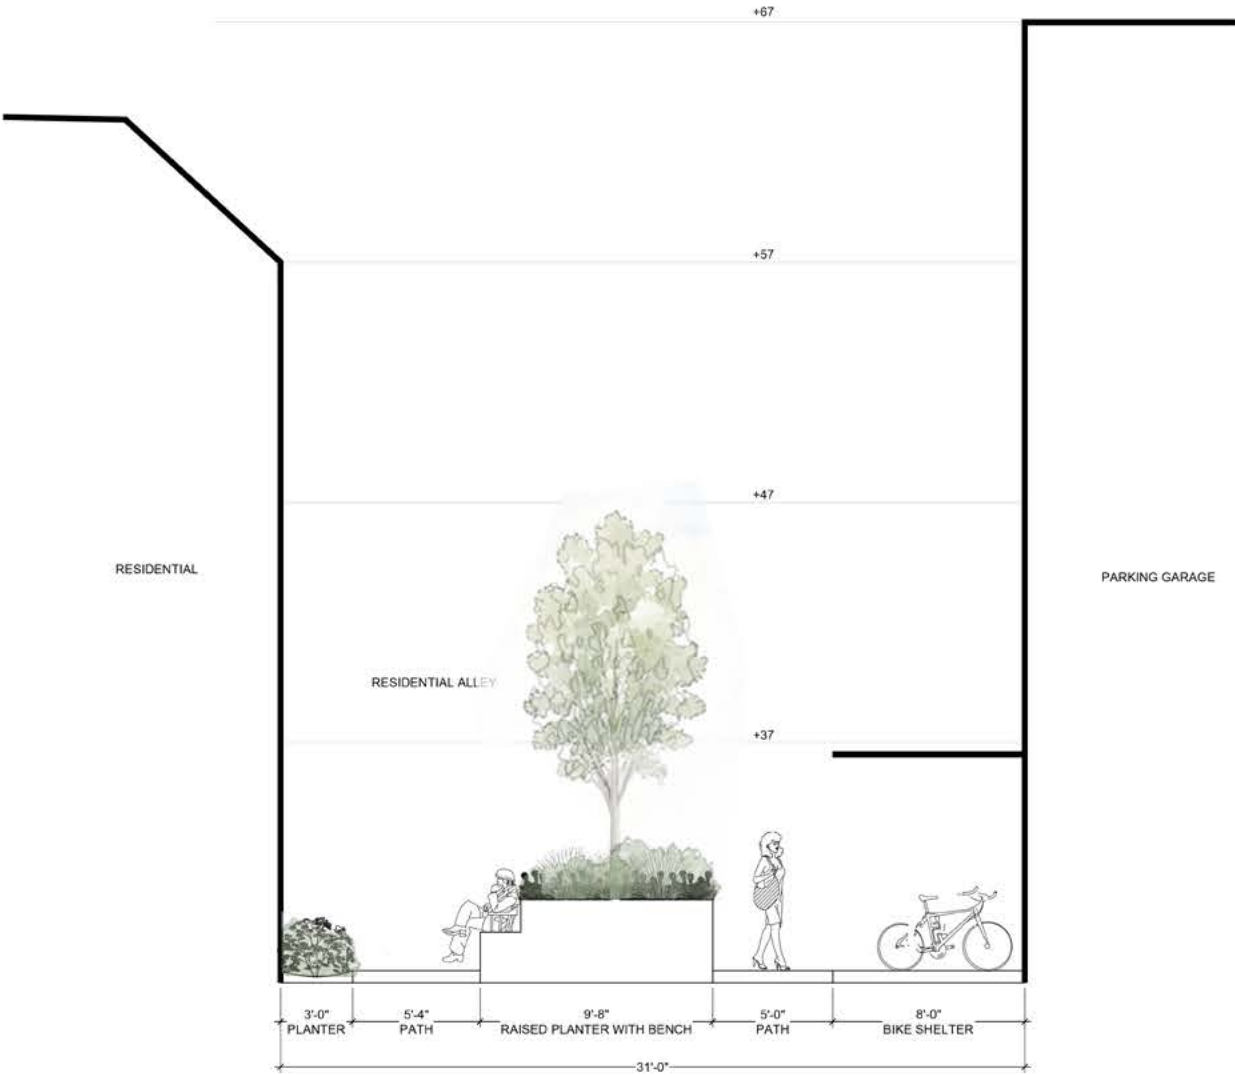

FIRE ACCESS ALLEY SECTION 2

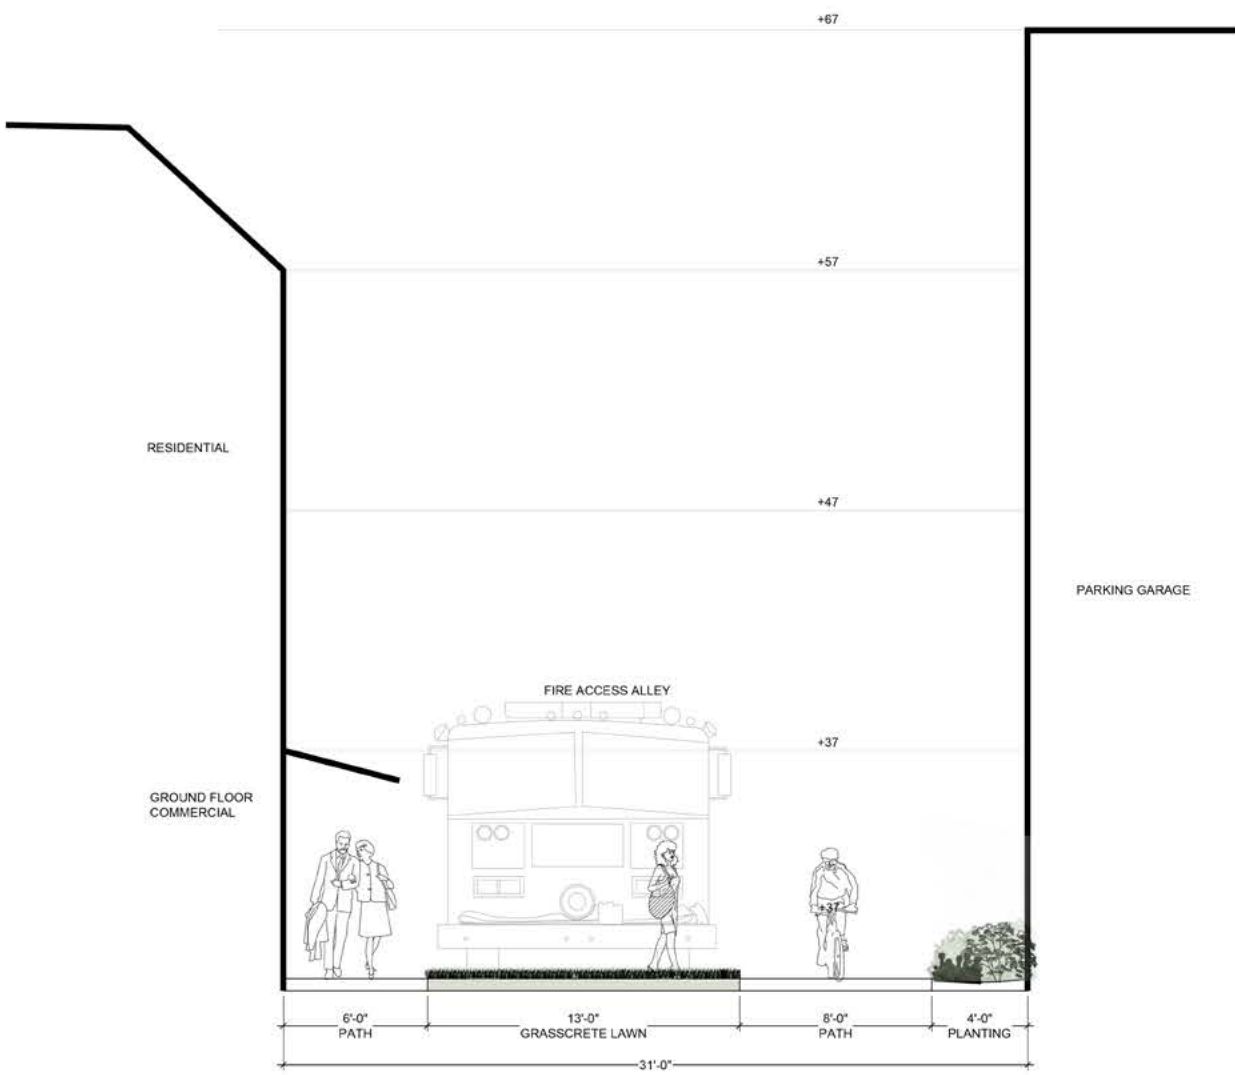

A street view of Black Bear Road in Black Bear, Colorado. The road is paved and has "Black Bear" painted on it. On the left, there are trees and a red building. On the right, there is a wooden building and a parking lot with cars. The sky is cloudy.

